

819 GLEN DRIVE
WOODMERE, NY 11598

ZONING ANALYSIS									
819 GLEN DRIVE, WOODMERE, NY 11598									
ZONING DISTRICT: RESIDENCE B SECTION: 39 BLOCK: 185 LOT: 11,12,13,14 LOT AREA: 6600.00 SQ. FT. OCCUPANCY: SINGLE FAMILY RESIDENCE		ZR SECTION	MAXIMUM PERMITTED	MINIMUM REQUIRED	EXISTING	PROPOSED	COMPLIANCE	NOTES	
		LOT AREA	6600.00 SQ. FT.						
LOT INFO	LOT SIZE	ARTICLE VII / 76		6,000 SQ.FT.	6600.00 SQ. FT.	6600.00 SQ. FT.	OK		
	LOT WIDTH	ARTICLE VII / 76		55'	66'-0"	66'-0"	OK		
COVERAGE	BUILDING AREA	ARTICLE VII / 69	1815.00 SQ. FT.		1797.91 SQ. FT.	2207.45 SQ. FT.	NO	VARIANCE GRANTED 04/06/22	
			27.50%		27.24%	33.45%			
	ACCESSORY DECKING / FRONT PORCH	ARTICLE VII / 69	165.00 SQ. FT.		0.00 SQ. FT.	262.88 SQ. FT.			
			2.50%		0.00%	3.98%			
BUILDING LIMITATIONS	TOTAL RIDGE/HEIGHT	ARTICLE VII / 68	2 1/2 ST OR 30'-0" FROM CROWN OF ROAD			26.36'	30'	OK	
YARD REQ'S	SIDE YARDS	ARTICLE VII / 71(3)		2 REQUIRED TOTAL= 16'-6"	TOTAL= 14'-10 1/2"	NO CHANGE	NO	EXISTING NON-CONFORMING	
				MIN. SIDE 5'-6" AND 11'-0"	5'-1 3/4" & 9'-9 3/4"	NO CHANGE			
	FRONT YARD	ARTICLE VII / 70		AVERAGE FRONT YARD SETBACK (19.03') OR 40'	25'-7 1/2"	NO CHANGE	OK		
	REAR YARD	ARTICLE VII / 72		25'-0"	24'-4 3/4"	NO CHANGE	NO	EXISTING NON-CONFORMING	

SCOPE OF WORK	
- ALTERATION/ADDITION TO EXISTING SINGLE FAMILY DWELLING	
SYMBOL LEGEND	
	EXISTING TO REMAIN
	EXISTING TO BE REMOVED
	NEW INTERIOR PARTITION: 2"x4" WOOD STUDS @ 16" O.C. WITH DOUBLE TOP ON BASE PLATES, 5/8" GYPSUM BOARD, BOTH SIDES SCREWED TO STUDS, TAPED, SPACKLED AND SANDED READY FOR PAINTING
	NEW INTERIOR PARTITION: 2"x4" WOOD STUDS @ 16" O.C. WITH DOUBLE TOP ON BASE PLATES, 1 LAYERS 5/8" GYPSUM BOARD TYPE X BOTH SIDES SCREWED TO STUDS, TAPED, SPACKLED AND SANDED READY FOR PAINTING
	NEW EXTERIOR WALL: 2"x4" WOOD STUDS W/R-22 SPRAY FOAM INSULATION, ONE LAYER INSIDE AND OUT OF 5/8" GYPSUM WALLBOARD 3/4" PLYWOOD SHEATHING & STUCCO VENEER
	NEW FOUNDATION WALL NEW 4000 P.S.I. POURED CONCRETE FOUNDATION WALL. SEE CONCRETE NOTES.

	<u>SMOKE & CARBON MONOXIDE DETECTOR</u>		<u>WINDOW IDEN.</u>
	<u>MECHANICAL VENT</u>		<u>DOOR IDEN.</u>
	<u>SECTION MARK</u> TOP DENOTES SECTION NUMBER BOTTOM DENOTES SHEET NUMBER		<u>FLOOR DRAIN</u>

A.C.	AIR CONDITIONING	CM	CARBON MONOXIDE	ELEC.	ELECTRIC		M.C.	MEDICINE CABINET	Q.T.	QUARRY TILE
A.D.	AREA DRAIN		DETECTOR	ELEV.	ELEVATION	H.B.	M.C.L.	METER CLOSET	RM.	ROOM
A.C.T.	ACOUSTIC TILE CEILING	C.M.T.	CORRUGATED METAL	EQ.	EQUAL	H.C.	MET.	METAL	RESIL.	RESILIENT
A.F.F.	ABOVE FINISHED FLOOR		BRICK TILE	E.W.P.M.	ELASTOMERIC	H.CAB.	M.&G.	METAL AND GLASS		
ALUM.	ALUMINUM	COL.	COLUMN		WATERPROOF	H.M.	MIN.	MINIMUM	S.H.	SERVICE HALL
A.N.	AS NOTED	CONC.	CONCRETE		MEMBRANE	H.P.	M.L.	METAL LOUVER	SM	SMOKE DETECTOR
APT.	APARTMENT	CONT.	CONTINUOUS			H.R.	M.O.	MASONRY OPENING	SPKL.	SPRINKLER
		CONV.	CONVECTOR	F.	FOYER	H.V.	M.V.	MECHANICAL	S.S.	SLOP SINK
B.	BATHROOM	CPT.	CARPET	F.A.I.	FRESH AIR INTAKE	H.V.A.C.		VENTILATION	ST.	STEEL
B.C.	BRICK COURSE	C.R.	CEILING REGISTER	F.D.	FLOOR DRAIN		O.C.	ON CENTER	S.T.C.	SOUND
BLDG.	BUILDING	C.S.	CAST STONE	F.F.	FINISHED FLOOR		O.D.	OUTSIDE DIAMETER		TRANSMISSION CLASS
BLK.	BLOCK	C.T.	CERAMIC TILE	FIN.	FINISH	I.D.	O.F.	OVER FLOW	STOR.	STORAGE
BM.	BEAM	C.W.	COLD WATER	FLASH'G	FLASHING	INSUL.	O.H.	OPPOSITE HAND	T.R.	TOP REGISTER
BOTT.	BOTTOM			FLR.	FLOOR		OP'G.	OPENING	T.V.	TOILET VENT(DUCT)
BR.	BRICK	D.	DIAMETER	F.P.	FIRE PROOF		P.	PAINTED	U.	URINAL
B.S.A.	BOARD OF STANDARDS	D.E.	DRYER EXHAUST	F.P.H.B.	FROST PROOF HOSE BIB	JT.	PART'N	PARTITION		
	AND APPEALS.	DET.	DETAIL	F.P.S.C.	FIRE PROOF SELF		P.D.	PUMP DISCHARGE	V.A.T.	VINYL ASBESTOS TILE
B.T.	BATH TUB	D.L.	DOUBLE LAYER	CLOSING		LAM.	P.D.R.	PLANTER DRAIN	V.C.J.	VERTICAL CONTROL
		DN.	DOWN	F.S.P.	FIRE STAND PIPE	LAV.	P.E.	PASSENGER ELEVATOR	JOINT	
CAB.	CABINET	D.W.	DISH WASHER			L.C.L.	P.H.V.	PUBLIC HALL	VEST.	VESTIBULE
CEM.ASB.	CEMENT ASBESTOS	DWG.	DRAWING	GA.	GAUGE	L.P.	VENT(DUCT)	POWDER ROOM	V.W.C.	VINYL WALL COVERING
C.H.	CONCRETE HARDENER			GALV.	GALVANIZED	L.R.	P.R.			
C.J.	CONSTRUCTION JOINT	E.C.	ESTABLISHED GRADE	GL.	GLASS	L.W.				
CL.	CLOSET	E.H.	ELECTRIC HEATER	GR.	GRADE					
CL'G.	CEILING	E.J.	EXPANSION JOINT	G.W.B.	GYPSUM WALL BOARD	MAX.				

THE GENERAL CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND REPORT ALL ERRORS AND OMISSIONS TO THE ARCHITECTS. DO NOT SCALE DRAWING. THE DRAWING SHALL NOT BE USED UNTIL SIGNED BY CONSULTANTS.

GENERAL CONSTRUCTION NOTES

- ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE RULES AND REGULATIONS OF THE NEW YORK CITY BUILDING CODE.
- THE ARCHITECT OF RECORD HAS NOT BEEN RETAINED FOR ANY FIELD SUPERVISION OR INSPECTION; HIS RESPONSIBILITY IS LIMITED TO ACCURACY OF THE PLANS, UNLESS OTHERWISE INDICATED BY APPLICATIONS.
- A SURVEY, BY A LICENSED SURVEYOR, SHOWING THE LOCATION OF THE BUILDINGS, PROPERTY LINES AND OTHER EXISTING SITE CONDITIONS SHALL BE FILED WITH THE DEPARTMENT OF BUILDINGS.
- PRIOR TO START OF ANY CONSTRUCTION, THE CONTRACTOR IS REQUIRED TO CHECK AND VERIFY ALL CONDITIONS AND DIMENSIONS AT JOB SITE AND DIMENSIONS OF PLANS. CONTRACTOR TO REPORT ANY DISCREPANCIES IN WRITING TO THE ARCHITECT OR ENGINEER BEFORE ANY ERECTION.
- CONTRACTOR SHALL VERIFY ALL LOCATIONS OF UTILITY LINES, LIGHT POLES, AND ALL STREET FIXTURES. CONTRACTOR SHALL MAKE PROPER TIE-INS, APPLY FOR PERMITS AS NECESSARY, REPORT TO THE ARCHITECT OR ENGINEER ANY CONDITION NOT CONSISTENT WITH THE DRAWINGS.
- NO PLANS SHALL BE SCALED, PLAN DIMENSIONS SHOULD BE USED.
- NOTICE OF START OF WORK SHALL BE GIVEN TO THE ARCHITECT
- A PERMIT SHALL BE ISSUED FOR EXCAVATING AND AFTER ESTABLISHING THE BEARING CAPACITY OF THE SOIL BY AN ARCHITECT OR ENGINEER OR THEIR REPRESENTATIVE AND SECURING APPROVAL THEREOF FROM THE DEPARTMENT OF BUILDINGS, THE PERMITS SHALL BE FOR THE ENTIRE CONSTRUCTION.
- NO FIRE HYDRANT OR UTILITY POLE, OR THREE SHALL BE WITHIN 5'-0" OF SPILAY OF ANY CURB CUT.
- ANY ALTERED GRADE EXCEEDING 30 DEGREE SLOPE SHALL HAVE A RETAINING WALL FILED AS AN AMENDMENT AND APPROVED BY DEPARTMENT OF BUILDINGS BEFORE THE START OF SUCH A WALL.
- THE STREET ON WHICH THIS BUILDING FRONTS IS OR WILL BE IMPROVED TO THE SATISFACTION OF THE DEPARTMENT OF HIGHWAYS. REQUIRED UTILITIES SHALL ALSO BE INSTALLED.
- SIDEWALK AND ROADWAY CONSTRUCTION OFF SITE WILL CONFORM TO DEPARTMENT OF HIGHWAYS SPECIFICATIONS. A SEPARATE APPROVAL FOR SIDEWALK CONSTRUCTION, INCLUDING WIDTH OF SIDEWALK WILL BE OBTAINED FROM THAT DEPARTMENT BEFORE SUCH WORK IS COMMENCED.
- ALL EXCAVATIONS SHALL BE KEPT SUBSTANTIALLY FREE OF WATER DURING FOUNDATION CONSTRUCTION WORK.
- PROTECT ALL ADJACENT PROPERTIES. PROPERLY SHORE, UNDERPIN AND MAKE SAFE ALL EXISTING CONDITIONS BEFORE PROCEEDING WITH ANY PART OF THE WORK.
- THE CONTRACTOR IS RESPONSIBLE FOR THE METHODS AND MEANS OF CONSTRUCTION AND FOR SITE SECURITY AND SAFETY AND WILL TAKE FULL PRECAUTIONS TO PROTECT WORKMEN, PASSERSBY OR ANY OTHER HAZARDS OF DEMOLITION OPERATIONS.
- CONTRACTOR SHALL OBTAIN A CERTIFICATE OF OCCUPANCY UPON COMPLETION OF ALL WORK.
- CONTRACTOR SHALL OBTAIN ALL PERMITS NECESSARY FOR CONSTRUCTION, INCLUDING THOSE FOR WORK OUTSIDE OF THE PROPERTY LINES, PAY ALL REQUIRED FEES TO THE D.O.B. BASED ON THE PROPOSED WORK OF THIS DRAWING FROM NEW YORK CITY BUILDING DEPARTMENT PRIOR TO START OF WORK.
- ALL MATERIALS, ASSEMBLIES, FORMS AND METHODS OF CONSTRUCTION AND SERVICE EQUIPMENT SHALL MEET THE FOLLOWING REQUIREMENTS:
 - SHALL HAVE BEEN ACCEPTABLE PRIOR THE EFFECTIVE DATE THE CODE BY THE BOARD OF STANDARDS AND APPEALS OR,
 - SHALL HAVE BEEN ACCEPTED FOR USE UNDER THE PRESCRIBED CODE TEST METHODS BY THE COMMISSIONER OR,
 - APPROVED BY THE BOARD OF STANDARDS AND APPEALS (C26-106.2)
- THE FOLLOWING ITEMS OF WORK SHALL BE SUBJECT TO CONTROLLED INSPECTION, MADE AND WITNESSED BY OR UNDER THE DIRECT SUPERVISION OF AN ARCHITECT OR ENGINEER RETAINED BY THE OWNER AND ACCEPTABLE TO ARCHITECT OF RECORD. TEST REPORTS AND CERTIFICATE OF INSPECTION SHALL BE FILED WITH THE BUILDING DEPARTMENT:
 - FIRE STOPPING OF:
 - HOLLOW PARTITIONS AND FURRED SPACES
 - CONCEALED SPACES WITHIN STAIR CONSTRUCTION
 - CEILING SPACE
 - EXTERIOR CORNICE
 - DUCT AND PIPE CHASES
 - CONCRETE MATERIALS FOR STRUCTURAL ELEMENTS PROPORTIONED ON THE BASIS OF CALCULATED STRESSES 70% OR GREATER OF BASIC ALLOWABLE VALUES C26-10040
 - STEEL WELDING OPERATIONS AND TENSIONS OF HIGH STRENGTH BOLTS (TABLE 10-1).
 - PLACING OF CONCRETE (TABLE 10-1).
 - REINFORCED MASONRY (TABLE 10-1).
 - UNREINFORCED MASONRY (TABLE 10-1).
- IT SHALL BE CONTRACTOR RESPONSIBILITY TO COMPLY WITH THE REQUIREMENTS AND STANDARDS OF THE BUILDING CODE, ZONING RESOLUTION, BS&A, A.C.I., ASTM & ANY OTHER GOVERNMENT AND NON-GOVERNMENT AGENCIES HAVING JURISDICTION. IT SHALL ALSO BE THE CONTRACTORS RESPONSIBILITY TO SEEK CERTIFICATION OF THE AFOREMENTIONED SECTIONS, REQUIREMENTS AND STANDARDS. IT SHALL BE ASSUMED THAT THE CONTRACTOR IS FULLY AWARE AND SHALL BE HELD RESPONSIBLE FOR THE ITEMS MENTIONED (BLDG. CODE, ZONE, RES. BS&A, A.C.I., ASTM, N.Y.S. ENERGY CONSERVATION CODE, ETC.) SHOULD THERE BE NO NOTIFICATION BY THE CONTRACTOR TO THE ARCHITECT.
- ALL MATERIALS NOT DESIGNATED FOR CONTROLLED INSPECTION SHALL BE SUBJECT TO SEMI-CONTROLLED INSPECTION FOR STRUCTURAL LUMBER AND PLUMBING MATERIALS, INSPECTION REPORTS, TEST REPORTS OR OTHER DOCUMENTATION BY THE PERSON SUPERINTENDING
- THE USE OF THE MATERIAL SHALL BE SUBMITTED TO THE DEPARTMENT PRIOR TO THE ISSUANCE OF THE APPLICATION FOR CERTIFICATE OF OCCUPANCY AND CERTIFICATE OF OCCUPANCY FORMS #24 & #54, IF NOT FILED WITH ORIGINAL APPLICATION PRIOR TO APPROVAL SHALL BE FILED AT SUCH TIME THERE WILL BE CHANGES IN BUILDING WHICH MAY NECESSITATE THE SUBMISSION OF REVISED SPECIFICATION SHEETS. IN CASE THERE ARE DISCREPANCIES BETWEEN THE GENERAL NOTES AND SPECIFIC ITEM SHOWN ON THE PLANS, THE ARCHITECT AND/OR ENGINEER ARE TO BE NOTIFIED IMMEDIATELY AND ALL WORK IS TO BE HALTED UNTIL THE DISCREPANCY IS RESOLVED.
- CONTRACTOR TO COORDINATE ALL EQUIPMENT BASE AND HOUSEKEEPING PADS WITH MECHANICAL, PLUMBING AND ELECTRICAL CONTRACTORS. EQUIPMENT BASES AND HOUSEKEEPING PADS TO BE A MINIMUM OF 4" HIGH UNLESS OTHERWISE NOTED. PROVIDE ONE LAYER OF WWF 6X8XW4 WELDED WIRE FABRIC MINIMUM, TO BE INSTALLED BENEATH THE FULL PROJECTED AREA OF EQUIPMENT.
- ALL WORK SHALL BE IN ACCORDANCE WITH ALL APPLICABLE CODES, ORDINANCES AND REQUIREMENTS ANY DISCREPANCIES SHALL BE BROUGHT TO THE ARCHITECT'S ATTENTION BEFORE PROCEEDING WITH THAT PORTION OF WORK.

- THE CONTRACTOR SHALL INVESTIGATE THE SITE AND THE EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION. HE SHALL NOTIFY THE ARCHITECT OF ANY ERRORS, OMISSIONS, CONFLICTS OR AMBIGUITIES IN AND BETWEEN THE PLANS, DRAWINGS AND SPECIFICATIONS PRIOR TO PROCEEDING WITH THAT PORTION OF THE WORK. IF SUCH NOTICE IS NOT FURNISHED TO ARCHITECT. THE CONTRACTOR SHALL BE DEEMED TO HAVE INSPECTED THE PLANS, DRAWINGS AND SPECIFICATIONS AND TO HAVE FOUND THEM IN PROPER FORM AND EXECUTION
- THE ARCHITECT DOES NOT HAVE CONSTRUCTION ADMINISTRATION RESPONSIBILITY FOR THIS PROJECT.
- ALL WORK SHALL BE DONE IN WORKMANLIKE MANNER BY SKILLED MECHANICS.
- THE WORK SHALL INCLUDE ALL MATERIALS AND LABOR NECESSARY TO COMPLETE DEMOLITION AN CONSTRUCTIONAL SHOWN ON THESE DRAWINGS.
- ALL CONTRACTORS AND SUBCONTRACTORS SHALL BE RESPONSIBLE FOR THE PROPER PERFORMANCE OF THEIR WORK, COORDINATION WITH OTHER TRADES, METHODS, SAFETY AND SECURITY ON THE SITE. SPECIAL ATTENTION TO SAFETY SHALL BE PROVIDED DURING ALL DEMOLITION WORK. THE ARCHITECT AND HIS AGENTS ARE NOT RESPONSIBLE OR LIABLE FOR THE ABOVE AND SHALL BE HELD HARMLESS AND INDEMNIFIED BY ALL CONTRACTORS FROM ANY CLAIMS, LOSSES OR SUITS OR LEGAL ACTION ARISING FROM THE PERFORMANCE OF WORK IN THIS PROJECT.
- THE INFORMATION SHOWN ON THESE DRAWINGS CONSTITUTES THE EXTENT OF ARCHITECTURAL SERVICES RENDERED TO THE CLIENT THE ARCHITECT HAS NO CONTRACTUAL OBLIGATION TO THE CLIENT BEYOND THE PREPARATION OF DRAWINGS SUITABLE FOR FILING FOR BUILDING PERMITS. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS. DRAWINGS SHALL NOT BE SCALED. THE ARCHITECT DISCLAIMS ALL RESPONSIBILITY IF CONSTRUCTION IS EXECUTED WITH DIMENSIONS SIZE OR MATERIALS THAT DEViate FROM THESE DRAWINGS.
- CONTRACTOR SHALL VERIFY ALL CLEARANCES AND SHALL BE RESPONSIBLE FOR SIZING ALL COMPONENTS OF HIS WORK AS NECESSARY FOR PROPER INSTALLATION.
- CONTRACTOR SHALL BE RESPONSIBLE TO DISTRIBUTE ADEQUATE COPIES OF THESE DRAWINGS AND SPECIFICATIONS TO ALL APPLICABLE TRADES AT ALL TIMES DURING THE PROGRESS OF THE JOB, INCLUDING SUBSEQUENT REVISIONS THERE IS TO BE ONE COMPLETE UP TO DATE SET AT THE JOB SITE AT ALL TIMES.
- IT IS THE INTENTION OF THIS CONTRACTOR TO REHABILITATE THE BUILDING, FINISHED AND READY FOR OCCUPANCY IN ACCORDANCE WITH THE CONTRACT DOCUMENTS AND ALL REQUIREMENTS OF THE LAW. ALTHOUGH ALL NECESSARY WORK MAY NOT BE ITEMIZED IN THE DRAWINGS AND SPECIFICATIONS, THE CONTRACTOR WILL FAMILIARIZE HIMSELF WITH THE EXISTING CONDITIONS AND INCLUDE ALL WORK SPECIFIED OR IMPLIED FOR THE COMPLETE REPAIR OF THE BUILDING.
- CONTRACTOR SHALL OBTAIN BUILDING PERMIT. NO WORK SHALL PROCEED UNLESS BUILDING PERMITS ARE DISPLAYED AT THE FRONT OF BUILDINGS. CONTRACTOR SHALL PAY FOR ALL PERMITS, LICENSED, INSPECTION FEES AND ALL OTHER CHARGES.
- CONTRACTOR SHALL OBTAIN NEW CERTIFICATE OF OCCUPANCY. HE SHALL OBTAIN ALL PERMITS AND FINAL APPROVALS OF ALL DEPARTMENTS HAVING JURISDICTION.
- ERECT TEMPORARY COVERED PASSAGEWAYS AT STREET LEVEL AS REQUIRED BY AUTHORITIES HAVING JURISDICTION.
- CONSTRUCTION OF BUILDING EXTERIOR ENVELOPE AND INSTALLATION OF HVAC, SERVICE WATER HEATING ELECTRICAL DISTRIBUTION AND ILLUMINATION SYSTEMS AND EQUIPMENT TO COMPLY WITH THE NEW YORK STATE ENERGY CONSERVATION CONSTRUCTION CODE, SECTION E-1016 (D)
- COORDINATE PATCHING INVOLVING THE VARIOUS TRADES WHETHER OR NOT SPECIFICALLY MENTIONED IN THE RESPECTIVE SPECIFICATIONS SECTIONS.
- CONTRACTOR TO FIE& SITE. SHOULD MEASURE EXISTING FLOOR TO FLOOR DIMENSIONS.
- STEAM CLEAN STREET FACADE AS SPECIFIED.
- REMOVE DEBRIS AS THE WORK PROGRESSES. MAINTAIN EXISTING PREMISES IN A NEW AND CLEAN CONDITION.
- REMOVE FROM THE SITE DEBRIS, RUBBISH AND OTHER MATERIALS RESULTING FROM WORK.
- THE CONTRACTOR SHALL RETAIN THE SERVICES OF A PROFESSIONAL ENGINEER LICENSED IN THE STATE OF NEW YORK WHO SHALL DESIGN AND SUPERVISE INSTALLATION OF ALL UNDERPINNING AND SHORING.
- THE CONTRACTOR FOR THE WORK OF THIS SECTION SHALL BE HELD TO HAVE VISITED THE SITE, EXAMINED THE PREMISES DETERMINED FOR HIMSELF THE EXISTING CONDITIONS, CHARACTER OF EQUIPMENT AND FACILITIES NEEDED FOR TIE PERFORMANCE OF THE WORK AND ALL MATTERS WHICH MAY IN WAY AFFECT THE WORK BEFORE SUBMITTING A BID.
- INFORMATION REGARDING EXISTING, CONSTRUCTION OR CONDITIONS IS BASED ON AVAILABLE RECORD DRAWING, WHICH MAY OR MAY NOT TRULY REFLECT EXISTING CONDITIONS. SUCH INFORMATION IS INCLUDED ON THE ASSUMPTION THAT IT MAY BE OF INTEREST TO THE CONTRACTOR. BUT THE ARCHITECT, CONSTRUCTION MANAGER, OWNER AND THEIR CONSULTANTS DO NOT ASSUME RESPONSIBILITY FOR ITS ACCURACY OR COMPLETENESS.
- THE GENERAL CONTRACTOR SHALL RETAIN THE SERVICES OF A LICENSED ARCHITECT/ENGINEER FOR ALL REQUIRED CONTROLLED INSPECTIONS.
- TOP OF ARCHITECTURAL FINISH OF FIRST FLOOR SEATING ELEVATION=0'-0" FOR THE PURPOSES OF THESE CONTRACT DOCUMENTS.
- REFER TO STRUCTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR ADDITIONAL GENERAL NOTES, ABBREVIATIONS AND SYMBOLS. ALL NOTES ARE TO BE REVISED AND APPLIED TO RELATED BUILDING COMPONENTS.NIF
- NOTES APPEAR ON VARIOUS SHEETS FOR DIFFERENT SYSTEMS AND MATERIALS. SHEETS ARE TO BE REVIEWED AND NOTES ON ANY ONE SHEET ARE TO BE APPLIED ON RELATED DRAWINGS AND DETAILS.
- DETAILS NOT SHOWN ARE SIMILAR IN CHARACTER TO THOSE DETAILED.WHERE SPECIFIED DIMENSIONS, DETAILS OR DESIGN INTENT CANNOT BE DETERMINED, CONSULT THE ARCHITECT BEFORE PROCEEDING WITH THE WORK.
- ALL ELEVATOR AND STAIR OPENINGS SHALL BE CERTIFIED BY THE ELEVATOR SUBCONTRACTOR PRIOR TO FORMING. REQUIRED MODIFICATIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR APPROVAL PRIOR TO FORMING.
- REFER TO CERTIFIED MECHANICAL AND ELECTRICAL CONTRACTORS DRAWINGS AND MANUFACTURERS TEMPLATE DRAWINGS FOR ALL MECHANICAL AND ELECTRICAL EQUIPMENT SUPPORTS, BOLT SETTING TEMPLATES, ISOLATIONS, SPRING ISOLATION,ETC, NOT SHOWN ON THE DRAWINGS.
- CONCRETE PADS AND MOUNTINGS IN MECHANICAL SPACES SHALL BE COORDINATED WITH ELECTRICAL AND PLUMBING CONTRACTORS.
- CONTRACTOR TO COORDINATE ALL MECHANICAL AND ELECTRICAL FLOOR AND WALL SLEEVES AND ALL MECHANICAL SHAFTS WITH MECHANICAL, PLUMBING, FIRE PROTECTION, ELECTRICAL, STRUCTURAL AND ARCHITECTURAL DRAWINGS.

- PROVIDE ACCESS PANELS AS APPLICABLE AND AS REQUIRED FOR MECHANICAL EQUIPMENT. ALL ACCESS PANELS SHALL BE CONCEALED, AND LOCATIONS SHALL BE REVIEWED WITH THE ARCHITECT PRIOR TO PROCEEDING.
- PORTABLE FIRE EXTINGUISHERS LOCATED ON THE DRAWINGS SHALL RECEIVE APPROVAL OF FIRE DEPARTMENT PRIOR TO INSTALLATION.
- ALL SPRINKLER HEADS IN ACOUSTICAL TILE SHALL BE INSTALLED CENTERED IN THE ACOUSTICAL TILE. (N/A) 22. ALL STRUCTURAL ELEMENTS WHICH DO NOT REQUIRE FIREPROOFING SHALL BE FIELD PAINTED.
- ALL EXTERIOR HANDRAILS AND EXTERIOR EXPOSED METAL SHALL BE GALVANIZED AND PAINTED UNLESS NOTED OTHERWISE.
- ALL EXTERIOR DOORS SHALL PREVENT AIR LEAKAGE/INFILTRATION AROUND THEIR PERIMETER WHEN IN A CLOSED POSITION.
- ALL EXTERIOR JOINTS AROUND WINDOW AND DOOR FRAMES, BETWEEN WALLS AND FOUNDATIONS, BETWEEN WALLS AND ROOFS, AND BETWEEN WALLS AND PANELS AT PENETRATION OF UTILITIES THROUGH THE ENVELOPE SHALL BE SEALED, CAULKED OR WEATHER STRIPPED TO PREVENT AIR LEAKAGE/INFILTRATION.
- ALL EXTERIOR SOFFITS SHALL BE CONSTRUCTED WITH RIGID GALVANIZED METAL FRAME MEMBERS AND SHALL RESIST UPLIFTING WIND LOADS OF 1.5 TIMES THE WIND PRESSURE DIAGRAM.
- ALL EXTERIOR SOFFITS SHALL BE INSTALLED TO PROVIDE A 'U' VALUE OF 0.09 SHALL HAVE A VAPOR BARRIER AND SHALL BE PROPERLY SEALED AGAINST AIR INFILTRATION.
- ALL DISSIMILAR METALS SHALL BE EFFECTIVELY ISOLATED FROM EACH OTHER TO AVOID MOLECULAR BREAKDOWN.
- FUTURE TENANT DEVELOPMENT TO BE COVERED UNDER SEPARATE PERMITS (N/A)
- THE CONTRACTOR SHALL REPLACE AND REPAIR MISSING, BROKEN SIDEWALK, CURB, OR ROADWAY DAMAGE DURING CONSTRUCTION AS DIRECTED BY THE BOROUGH.

PARTITION NOTES

- DEFLECTION FOR ALL PARTITIONS SHALL NOT EXCEED 1/240TH OF THE SPAN MAXIMUM FOR TYPICAL GYPSUM PARTITIONS, OR 1/360 FOR WOOD-CLAD PARTITIONS, OR STONE-CLAD PARTITION SYSTEMS.
- WATER RESISTANT DRYWALL (FOR THE FULL HEIGHT OF THE PARTITION CONSTRUCTION) SHALL BE USED IN TOILETS, SHOWERS, SERVICE ROOMS, ETC. USE STANDARD GYPSUM BOARD FOR CEILING CONSTRUCTION.
- PENETRATIONS: COORDINATE WITH MECHANICAL CONTRACTOR FOR OPENINGS REQUIRED FOR RETURN AIR IN FULL HEIGHT PARTITIONS.
- PROVIDE LATERAL BRACING TO STRUCTURE ABOVE FINISHED CEILINGS FOR PARTITIONS EXCEEDING UNSUPPORTED HEIGHTS INDICATED ON DRAWINGS.
- PROVIDE HORIZONTAL CONTROL JOINTS AT 12'-0" O.C. IN THE VERTICAL DIRECTION UNLESS NOTED OTHERWISE.
- PROVIDE CONTROL JOINTS IN GYPSUM WALLBOARD CONSTRUCTION SUCH THAT PARTITION OR FURRING RUNS DO NOT EXCEED 30' AND CEILING DIMENSIONS DO NOT EXCEED 50' IN EITHER DIRECTION WITH PERIMETER RELIEF OR 30' WITHOUT PERIMETER RELIEF.
- PROVIDE VERTICAL CONTROL JOINTS WITH SEALANT IN MASONRY WALLS AS SHOWN IN DRAWINGS WITH MAXIMUM SPACING OF 25'-0".
- COMPLETELY SEAL WITH ACOUSTICAL SEALANT HEADS, BASES, AND ENDS, PLUS ALL PENETRATIONS(INCLUDING BUT NOT LIMITED TO MECHANICAL, ELECTRICAL, AND PLUMBING WORK).
- PROVIDE SOUND BLANKETS AS INDICATED.

SMOKE AND CARBON MONOXIDE NOTES


- SMOKE DETECTORS SHALL BE B.S.A. APPROVED AND U.L. APPROVED.
- POWER SOURCE SHALL BE PRIMARY BUILDING POWER.
- PRIMARY CIRCUIT BREAKER DEVICES SHALL BE THE ONLY SOURCE OF SWITCHING.
- ALL SMOKE DETECTORS MUST BE INSTALLED ON EVERY SLEEPING ROOM AND WITHIN 15'-0" OF THE ENTRANCE OF ANY SLEEPING ROOM.

ENERGY NOTES

TO THE BEST OF MY KNOWLEDGE, BELIEF AND PROFESSIONAL JUDGMENT, THESE PLANS AND SPECIFICATIONS ARE IN COMPLIANCE WITH THE 2016 NYCCEC CHAPTER R4

AREA OF WORK LEGEND

- EXISTING
- PROPOSED
- PROPOSED DECKING

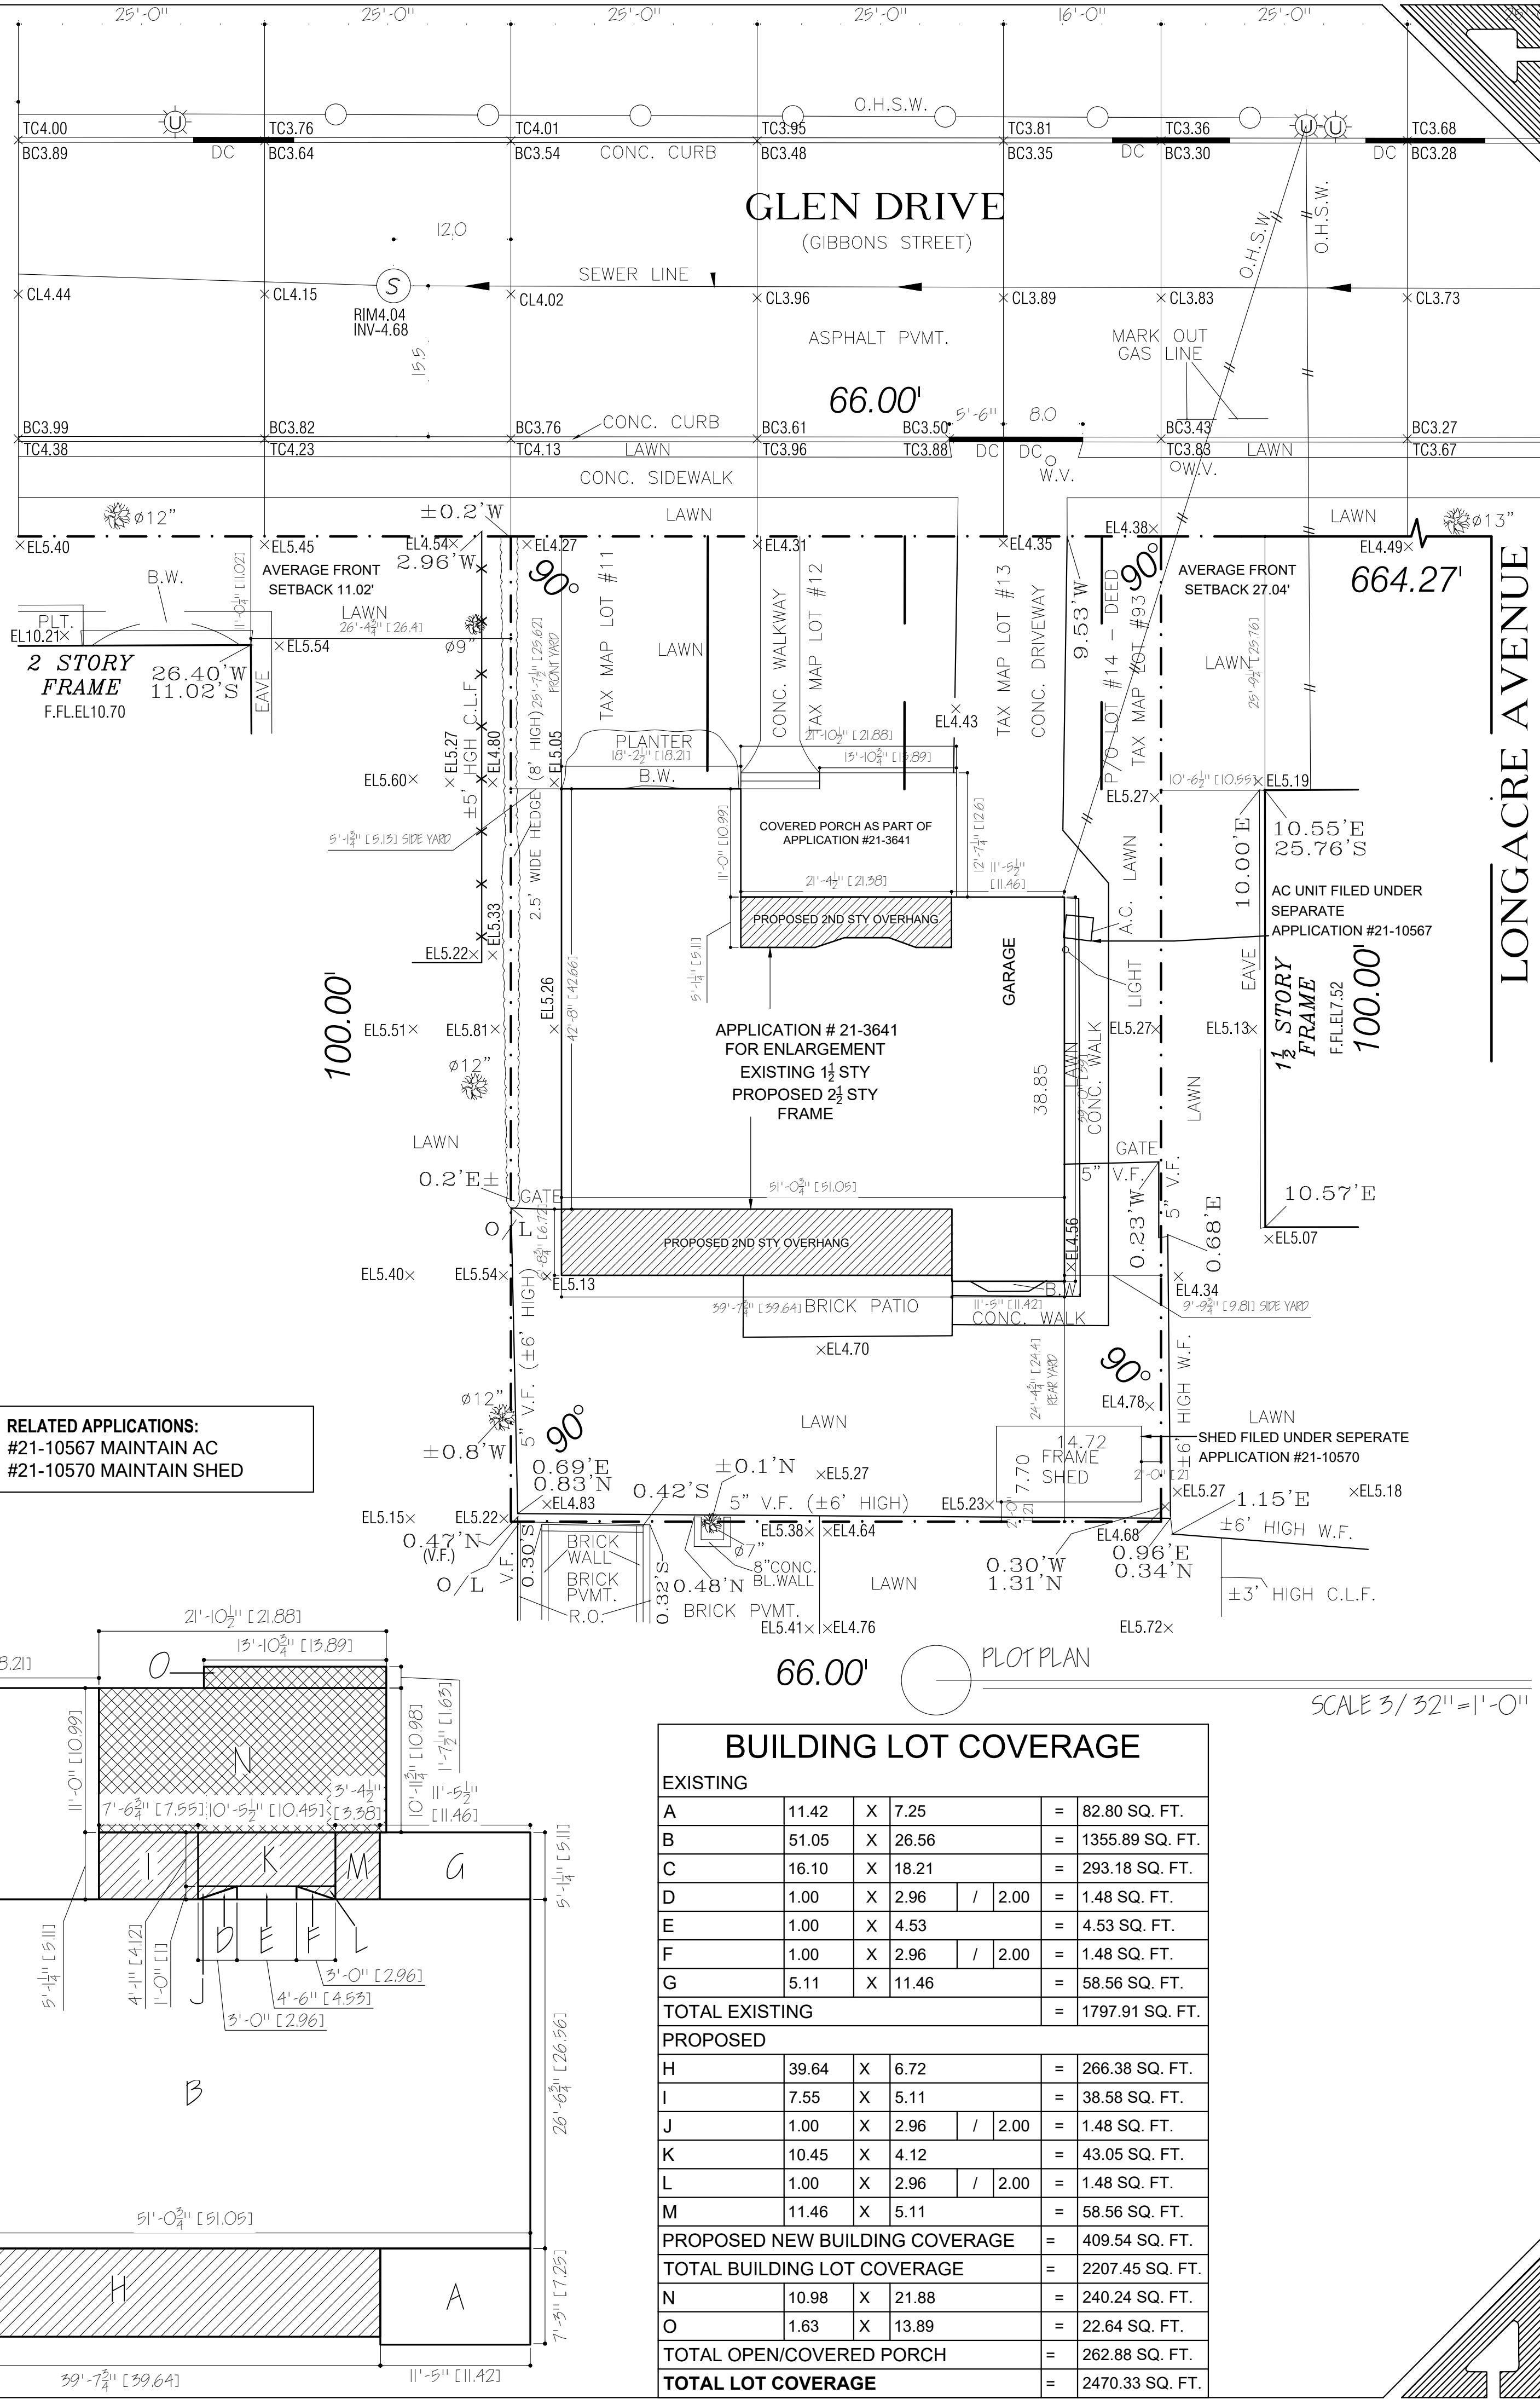

Shmuel D. Flaum

SDF architect

APPLICANT:

SHMUEL D. FLAUM R.A. NCARB
207 LAWRENCE AVE
INWOOD, NY 11096
(718) 471-5389

DOB APPLICATION NUMBER:

21-3641

DESCRIPTION

DATE

NO.

PROJECT NAME / LOCATION:

819 GLEN DRIVE
WOODMERE, NY 11598
SECTION: 39
BLOCK: 185
LOT: 11

DRAWING TITLE:

NOTES
PLOT PLAN
ZONING DIAGRAM

EXAMINER'S SIGNATURE

PROFESSIONAL SEAL:

REGISTERED ARCHITECT
SHMUEL D. FLAUM
STATE OF NEW YORK
034659

CLIENT:

AK

SCALE:

AS NOTED

DRAWN BY:

AR

CHECKED BY:

SDF

DATE:

9/9/22

PROJECT NO.:

0335


DRAWING NO.:

T-101.00


2 OF 9

BARCODE

THE GENERAL CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND REPORT ALL SCALE ERRORS AND OMISSIONS TO THE ARCHITECTS. DO NOT SCALE DRAWING. ONE DRAWING SHALL NOT BE USED UNTIL SIGNED BY CONSULTANTS.

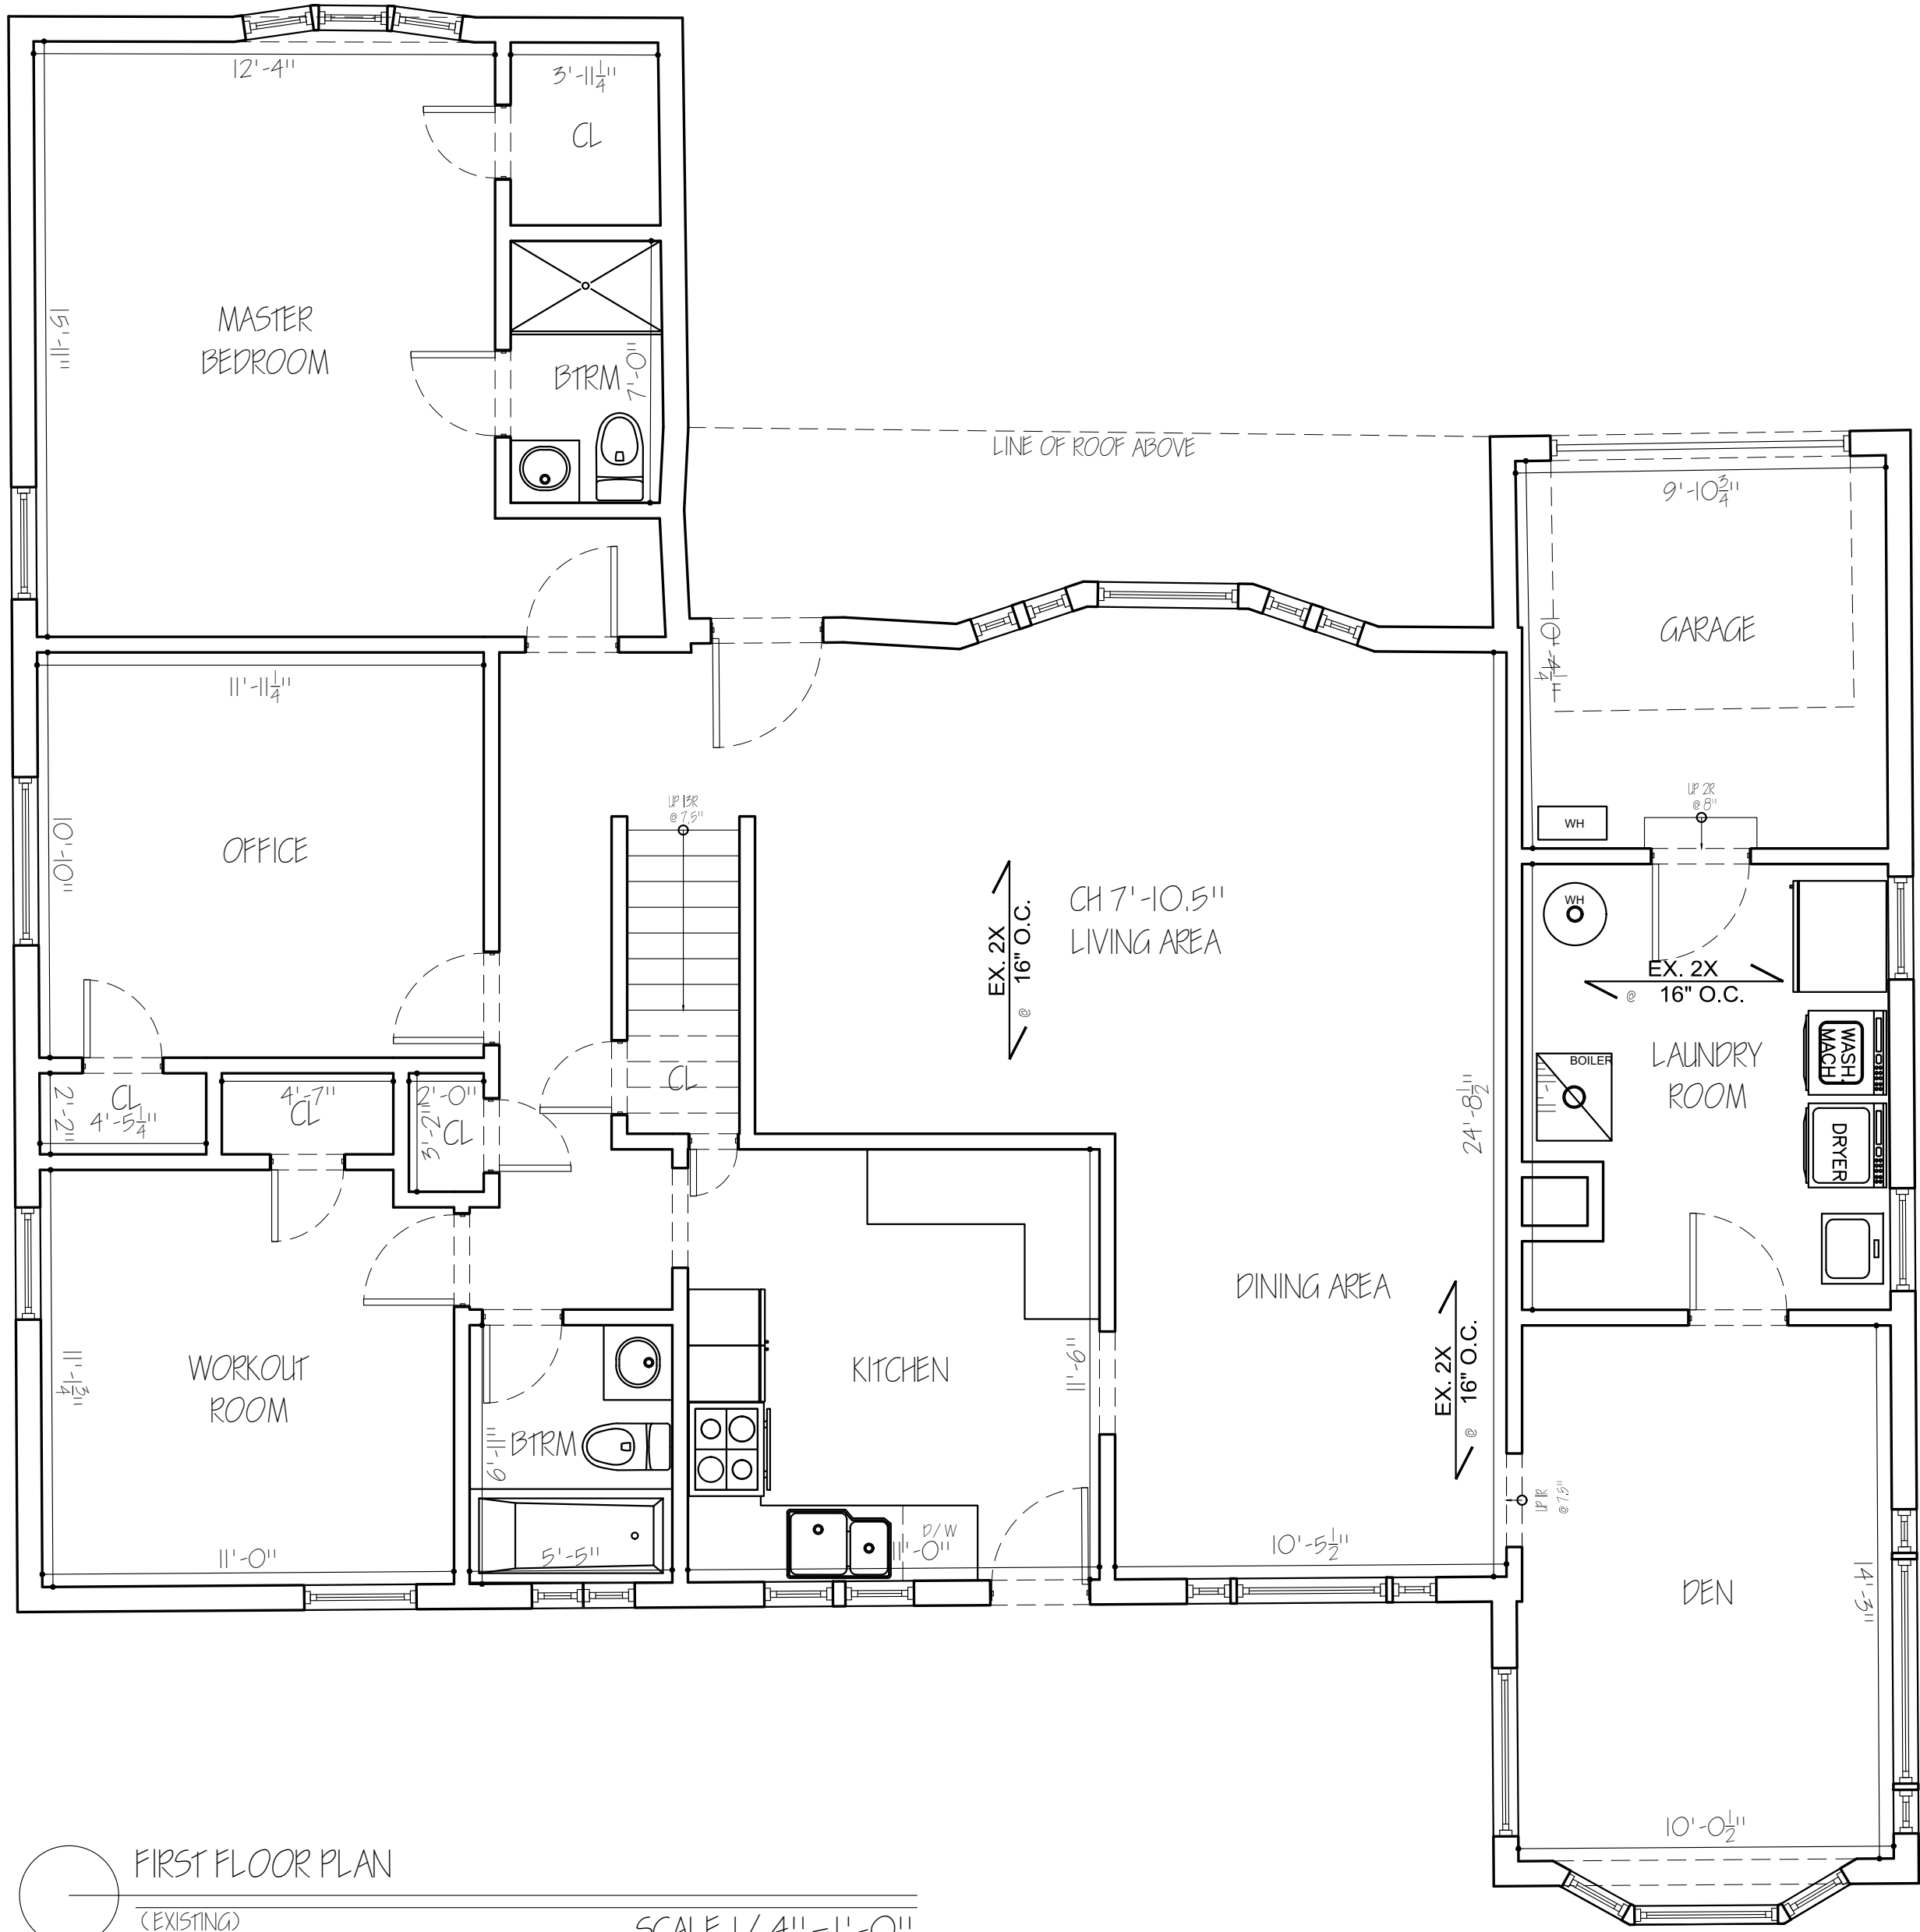

FIRST FLOOR PLAN
(EXISTING)
SCALE 1/4" = 1'-0"

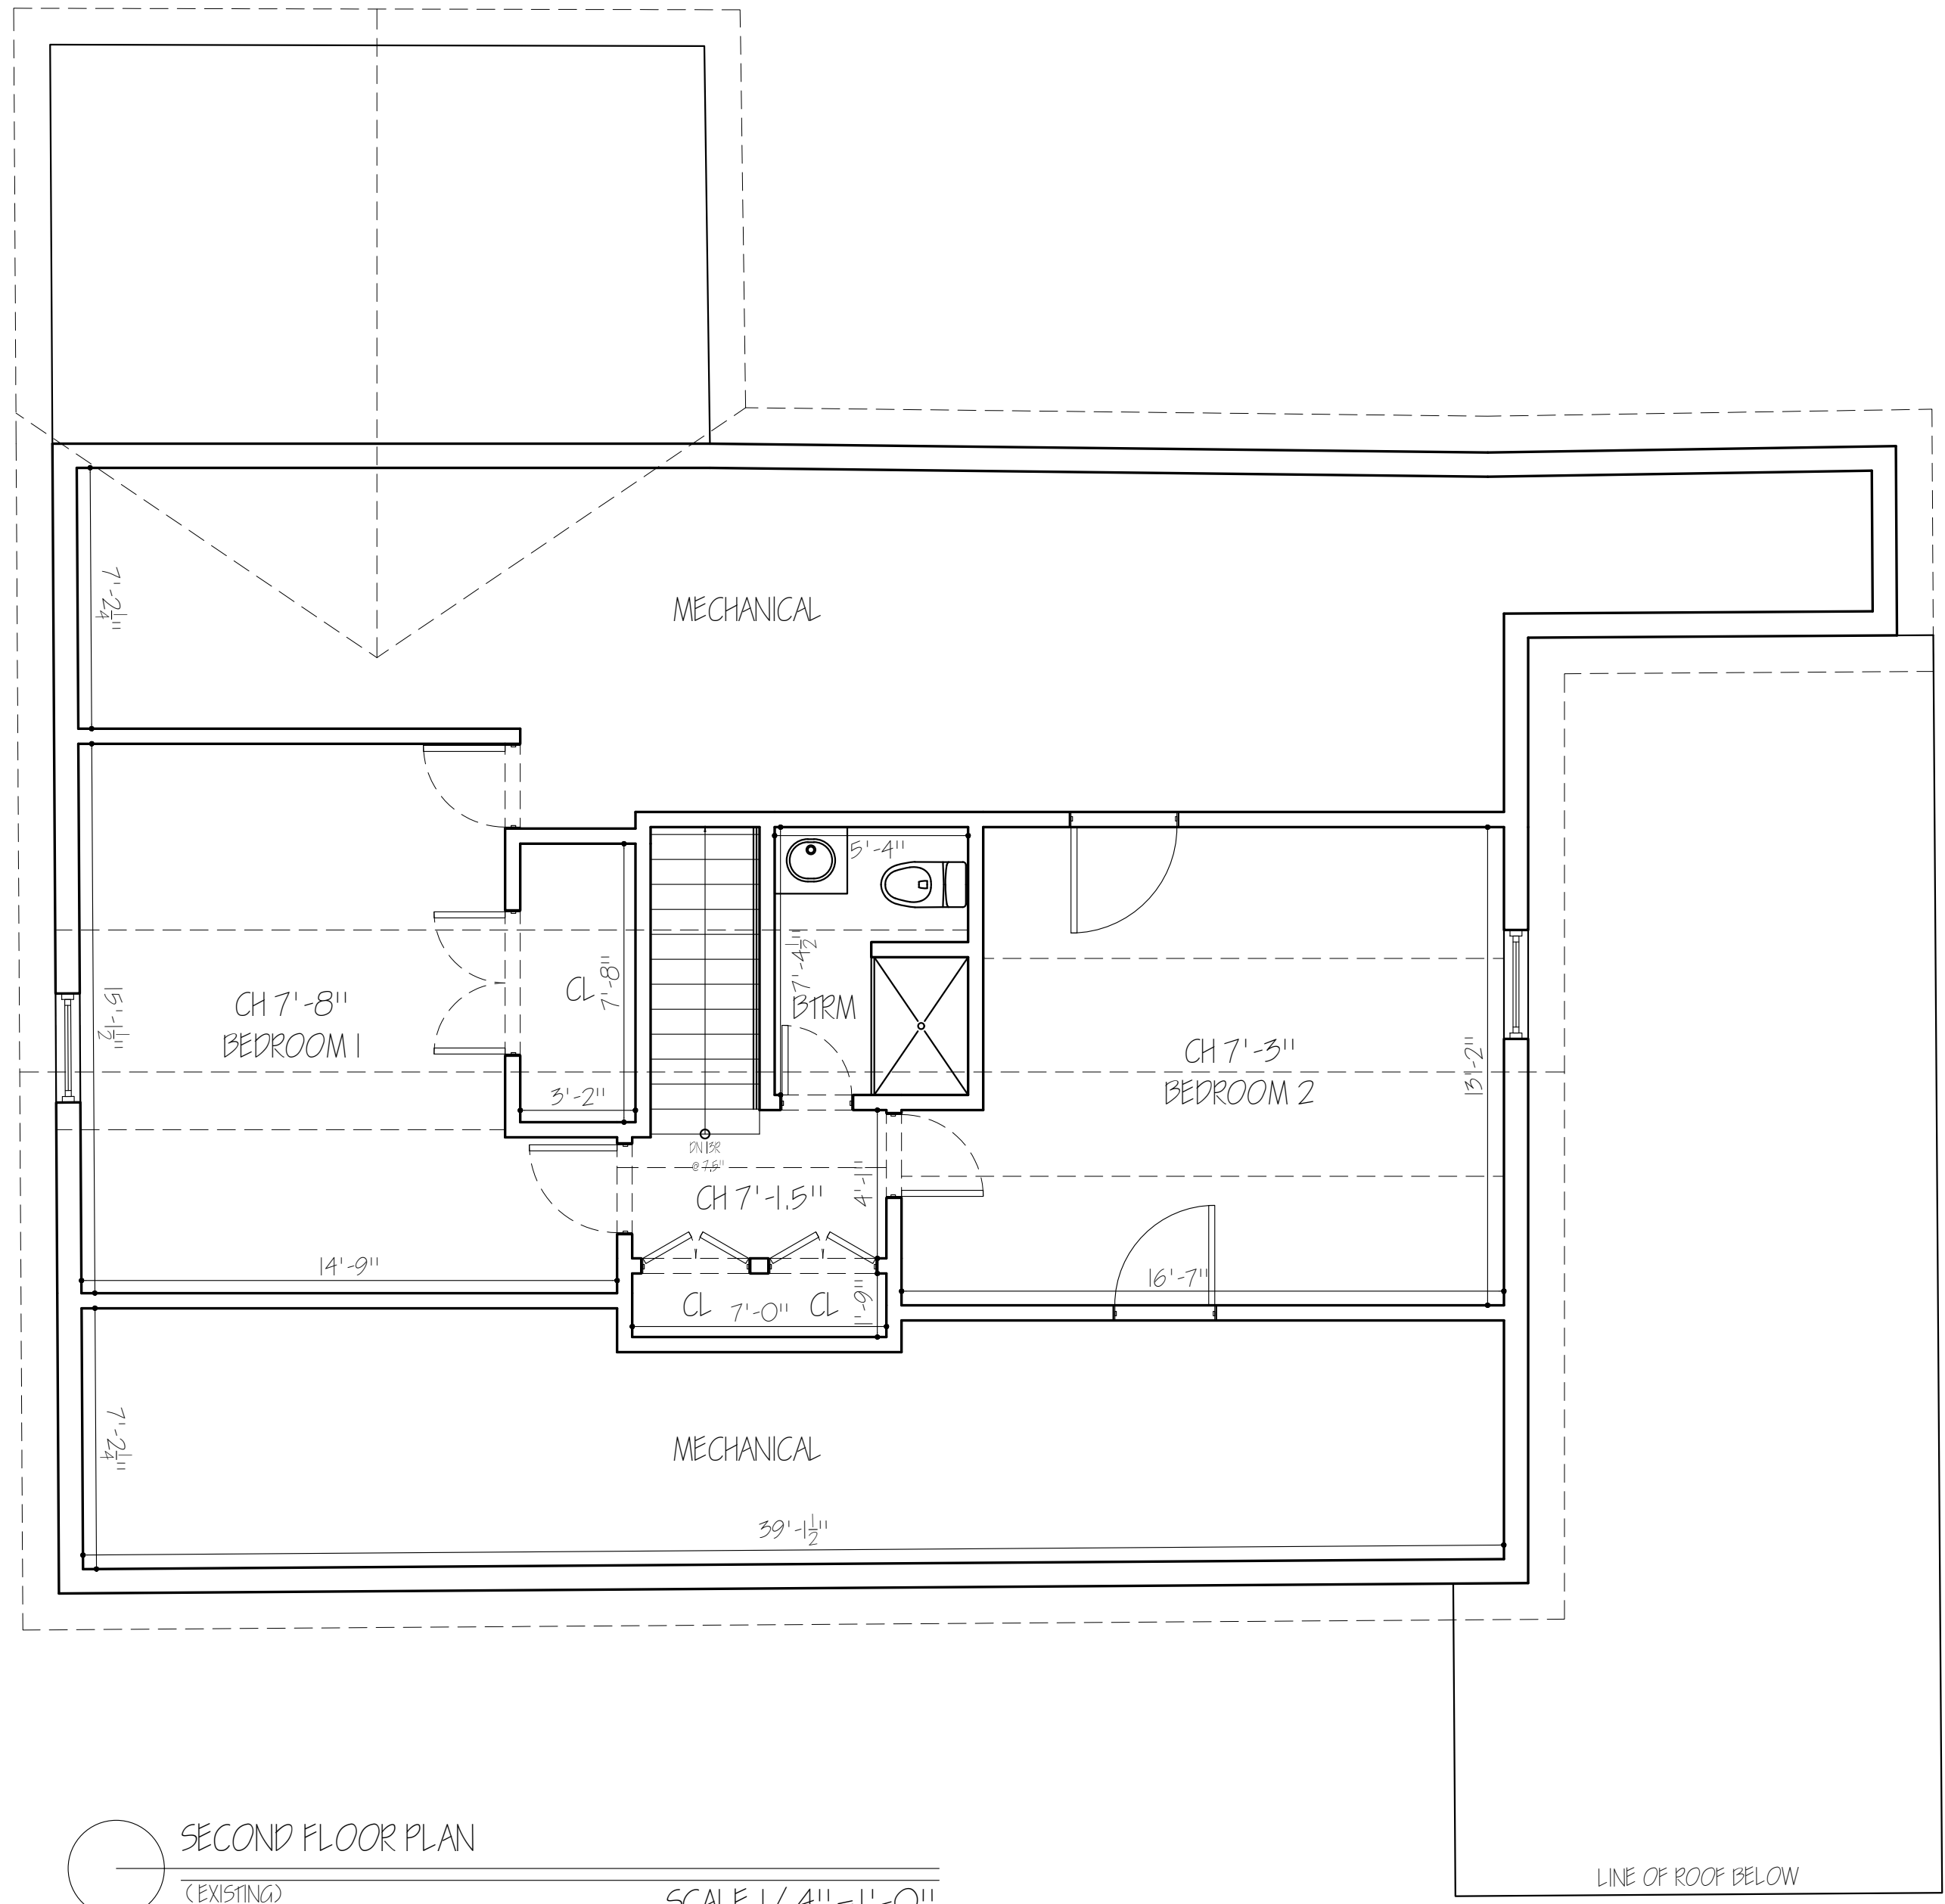

SECOND FLOOR PLAN
(EXISTING)
SCALE 1/4" = 1'-0"

Shmuel D. Flaum
SDF
architect

APPLICANT:

SHMUEL D. FLAUM R.A. NCARB
207 LAWRENCE AVE
INWOOD, NY 11096
(718) 471-5389

DOB APPLICATION NUMBER:

21-3641

DESCRIPTION	DATE	NO.

PROJECT NAME / LOCATION:

819 GLEN DRIVE
WOODMERE, NY 11598
SECTION: 39
BLOCK: 185
LOT: 11

DRAWING TITLE:

EXISTING FIRST FLOOR PLAN

EXAMINER'S SIGNATURE

PROFESSIONAL SEAL:



CLIENT: AK
SCALE: AS NOTED
DRAWN BY: AB
CHECKED BY: SDF
DATE: 9/9/22
PROJECT NO. 0335

A-00.00

DRAWING NO.


3 OF 9

BARCODE


THE GENERAL CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND REPORT ALL ERRORS AND OMISSIONS TO THE ARCHITECTS. DO NOT SCALE DRAWING. THE DRAWING SHALL NOT BE USED UNTIL SIGNED BY CONSULTANTS.

DEMOLITION AND PROTECTION NOTES

1. THE CONTRACTOR SHALL COMPLY WITH THE REQUIREMENTS OF ALL APPLICABLE FEDERAL, STATE AND LOCAL SAFETY AND HEALTH REGULATIONS REGARDING THE DEMOLITION OF STRUCTURES.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE TO ADJACENT PROPERTY.
3. THE CONTRACTOR SHALL SUBMIT A WRITTEN NOTIFICATION TO THE ARCHITECT AND OWNER DURING THE WORK OF DEMOLITION AND CUTTING CONDITIONS ARE DISCOVERED WHICH SIGNIFICANTLY VARY FROM THOSE SHOWN ON THE DRAWINGS.
4. THE CONTRACTOR SHALL ACCEPT THE CONDITION OF THE SITE AND STRUCTURES AS FOUND. THE ARCHITECT, CONSTRUCTION MANAGER AND OWNER ASSUME NO RESPONSIBILITY FOR CONDITION OF SITE OR STRUCTURES NOR THE CONTINUATION OF THE CONDITION EXISTING AT TIME OF BIDDING OR THERE AFTER.
5. CONDUCT DEMOLITION OPERATIONS AND THE REMOVAL OF DEBRIS TO ENSURE MINIMUM INTERFERENCE WITH ROADS, STREETS, WALKS AND OTHER ADJACENT OCCUPIED OR USED FACILITIES AGAINST DAMAGE DURING DEMOLITION OPERATIONS.
6. MAINTAIN ANY EXISTING UTILITIES REQUIRED TO REMAIN KEEP IN SERVICE AND PROTECT.
7. DISCONNECT AND SEAL ANY ABANDONED UTILITIES BEFORE STARTING DEMOLITION OPERATIONS COORDINATE ALL WORK WITH LOCAL UTILITY COMPANIES HAVING JURISDICTION.
8. BEFORE COMMENCING ANY ALTERATION OR DEMOLITION WORK SUBMIT FOR REVIEW BY THE ARCHITECT, CONSTRUCTION MANAGER AND APPROVAL OF THE OWNER, A CONSTRUCT PROGRESS SCHEDULE SHOWING THE COMMENCEMENT, THE ORDER AND THE COMPLETION DATES FOR THE VARIOUS PARTS OF THIS WORK.
9. CONTRACTOR WILL EXECUTE DEMOLITION WORK TO INSURE PROTECTION OF EXISTING PORTIONS OF BUILDING TO REMAIN AGAINST DAMAGES.
10. CONTRACTOR WILL TAKE PRECAUTIONS TO GUARD AGAINST MOVEMENT, SETTLEMENT, DAMAGE, OR COLLAPSE OF ANY PART OF BUILDING, SIDEWALKS, ADJACENT PROPERTY OR STREET PASSAGES, BE LIABLE FOR ANY SUCH DAMAGE DOES ACCIDENTALLY OCCUR, CONTRACTOR SHALL REPAIR PROMPTLY AT NO COST TO OWNER.
11. CONTRACTOR WILL MAKE SUCH EXPLORATIONS AND PROBES AS ARE NECESSARY TO ASCERTAIN ANY REQUIRED PROTECTIVE MEASURES BEFORE PROCEEDING WITH DEMOLITION AND REMOVALS GIVE PARTICULAR ATTENTION TO SHORING AND BRACING REQUIREMENTS SO AS TO PREVENT ANY DAMAGE TO EXISTING CONSTRUCTION.
12. PROVIDE INTERIOR AND EXTERIOR SHORING, BRACING OR SUPPORT TO PREVENT MOVEMENT OF SETTLEMENT OR COLLAPSE OF STRUCTURES TO BE DEMOLISHED AND ADJACENT FACILITIES TO REMAIN A PROFESSIONAL ENGINEER RETAINED BY THE CONTRACTOR AT CONTRACTOR EXPENSE SHALL ADVISE ON BRACING AND SHORING UNDERPINNING OR OTHER STRUCTURAL REQUIREMENTS THE CONTRACTOR SHALL BEAR ALL RESPONSIBILITY FOR PREVENTION OF MOVEMENT OR OTHER STRUCTURAL FAULT.
13. INSPECT EXISTING CONDITIONS OF THE PROJECT, PRIOR TO COMPLETING DEMOLITION WORK, INCLUDING ELEMENTS SUBJECT TO DAMAGE OR TO MOVEMENT DURING DEMOLITION AND CUTTING AFTER UNCOVERING WORK, INSPECT THE CONDITIONS AFFECTING THE INSTALLATION OR PERFORMANCE OF THE WORK REPORT DIFFERING OR QUESTIONABLE CONDITIONS TO THE ARCHITECT IN WRITING. DO NOT PROCEED WITH THE WORK UNTIL THE ARCHITECT HAS PROVIDED FURTHER INSTRUCTIONS.
14. PROVIDE ADEQUATE TEMPORARY SUPPORT AS NECESSARY TO ASSURE THE STRUCTURAL VALUE OR INTEGRITY OF THE AFFECTED PORTION OF THE WORK.
15. USE WATER SPRINKLING, TEMPORARY ENCLOSURES AND OTHER SUITABLE METHODS TO LIMIT THE AMOUNT OF DUST AND DIRT RISING AND SCATTERING IN THE AIR TO THE LOWEST PRACTICAL LEVEL. COMPLY WITH GOVERNING REGULATIONS PERTAINING TO ENVIRONMENTAL PROTECTION, DO NOT USE WATER WHEN IT MAY CREATE HAZARDOUS OR OBJECTIONABLE CONDITIONS SUCH AS ICE FLOODING AND POLLUTION PROVIDE ADEQUATE DRAINAGE TO HOME SEWER, AND PROVIDE PUMPING WHERE NECESSARY.
16. CLEAN ADJACENT STRUCTURES AND PROPERTIES OF DUST DIRT AND DEBRIS CAUSED BY DEMOLITION OPERATIONS. RETURN ADJACENT AREAS TO CONDITION EXISTING PRIOR TO THE START OF THE WORK.
17. DO NOT CUT OR REMOVE CONSTRUCTION WHICH MIGHT WEAKEN OR IMPAIR THE STRUCTURAL INTEGRITY OR STRENGTH OF THE STRUCTURAL FRAMING OR SUPPORT SYSTEMS WHICH ARE TO REMAIN.
18. WHERE PORTIONS OF STRUCTURES ARE TO BE REMOVED REMAINING PORTIONS SHALL BE PROTECTED FROM DAMAGE AND PREPARED TO FIT NEW CONSTRUCTION DAMAGE TO PORTIONS OF STRUCTURES SHOWN TO REMAIN SHALL BE PREPARED AT CONTRACTOR'S EXPENSE.
19. 1BE READY AT ANY TIME TO PROMPTLY PROVIDE, ADD TO OR STRENGTHEN TEMPORARY SHORING, BRACING OR SUPPORT FOR EXISTING WORK IN CASE EXISTING CONSTRUCTION BEGINS TO SHOW SIGNS OF STRUCTURAL STRESS.
20. TRANSPORT MATERIALS REMOVED FROM DEMOLISHED STRUCTURES AND LEGALLY DISPOSE OF OFF SITE. PAY ANY AND ALL FEES ASSOCIATED WITH DISPOSAL WORK. LEAVE THE SITE IN AN ORDERLY CONDITION TO THE APPROVAL OF THE ARCHITECT.
21. REMOVAL OF EXISTING MASONRY AND CONCRETE SHALL BE PERFORMED BY HAND. NO JACKHAMMER OR EXPLOSIVES SHALL BE USED.
22. ALL UNDERGROUND UTILITY SERVICES SHALL BE PROTECTED.
23. PROTECT EXIST FACADE AND CORNICE.
24. SCOPE OF DEMOLITION AND REMOVALS TO INCLUDE THE FOLLOWING: ALL INTERIOR PARTITIONS AND TRIM, ETC. ALL WOOD JOISTS AND FRAMING ALL MASONRY WHERE SHOWN ALL MISC. DEBRIS AND REFUSE WITHIN BUILDING & SITE. ALL EXISTING INTERIOR PARTITIONS AND SIDE WALL FURRING.
25. PATCH, REPAIR, PAIN AND/OR REPLACE TO MATCH EXISTING, ALL WORK TO REMAIN THAT IS DAMAGED OR OTHERWISE AFFECTED BY WORK OF THIS PROJECT. SEE ALL DRAWINGS, INCLUDING MECHANICAL, ELECTRICAL, PLUMBING AND STRUCTURAL.
26. WHERE NEW FLOOR FINISH IS CALLED FOR, THE EXISTING FINISH SHALL BE PREPARED TO RECEIVE THE NEW FINISH.
27. PROVIDE DUST BARRIERS AT ALL OCCUPIED AREAS ADJACENT TO NEW WORK AND AT PUBLIC AREAS AFFECTED BY NEW WORK.
28. PAINT NEW WORK REQUIRING PAINTING IN COLORS TO BE SELECTED BY ARCHITECT.
29. ALL SCHEDULES SHALL BE REVIEWED WITH THE OWNER AND NO WORK SHALL COMMENCE UNTIL WRITTEN APPROVAL OF SCHEDULES IS OBTAINED FROM THE OWNER. ALL APPROVALS OF WORK SCHEDULES SHALL BE OBTAINED BY THE CONTRACTOR.
30. IN ADDITION TO WORK SHOWN ON ARCHITECTURAL DRAWINGS, COORDINATE WITH HVAC, PLUMBING, ELECTRICAL AND STRUCTURAL DRAWINGS FOR OTHER WORK OF PROJECT.
31. ALL EXISTING MATERIALS REMOVED BY CONTRACTOR TO PERFORM NEW WORK AND TO BE REINSTALLED SHALL BE PROTECTED BY THE CONTRACTOR AND IF DAMAGED SHALL BE REPLACED AT HIS OWN EXPENSE.
32. WHERE PARTITIONS ARE REMOVED AND/OR RELOCATED, REPAIR FLOOR CEILING AND WALLS TO MATCH ADJACENT SURFACES.
33. WHERE NEW MASONRY PARTITIONS ARE PROVIDED, REMOVE THE EXISTING FLOOR, WALLS AND CEILING FINISHES TO PROVIDE PROPER BONDING BETWEEN THE NEW PARTITION AND THE EXISTING STRUCTURE.
34. WHERE NEW PARTITION HAVE TO GO UP THROUGH EXISTING HUNG CEILING, CUT AND REPAIR CEILING AS NECESSARY AND PROVIDE NEW CEILING MOLDINGS TO SUIT THE TYPE OF CEILING.
35. WHERE MECHANICAL AND/OR ELECTRICAL WORK IS TO BE INSTALLED AND/OR REMOVED OVER EXISTING HUNG CEILING WHICH ARE TO REMAIN, REMOVE PART OF THE CEILING AS NECESSARY TO PERFORM THE NEW WORK, REPLACE THE CEILING AFTER THE WORK IS INSTALLED, PROVIDE ALL CUTOUTS AND CEILING MOLDINGS REQUIRED TO ACCOMMODATE THE INSTALLATION OF THE NEW REGISTERS, DIFFUSERS AND OTHER CEILING ITEMS.

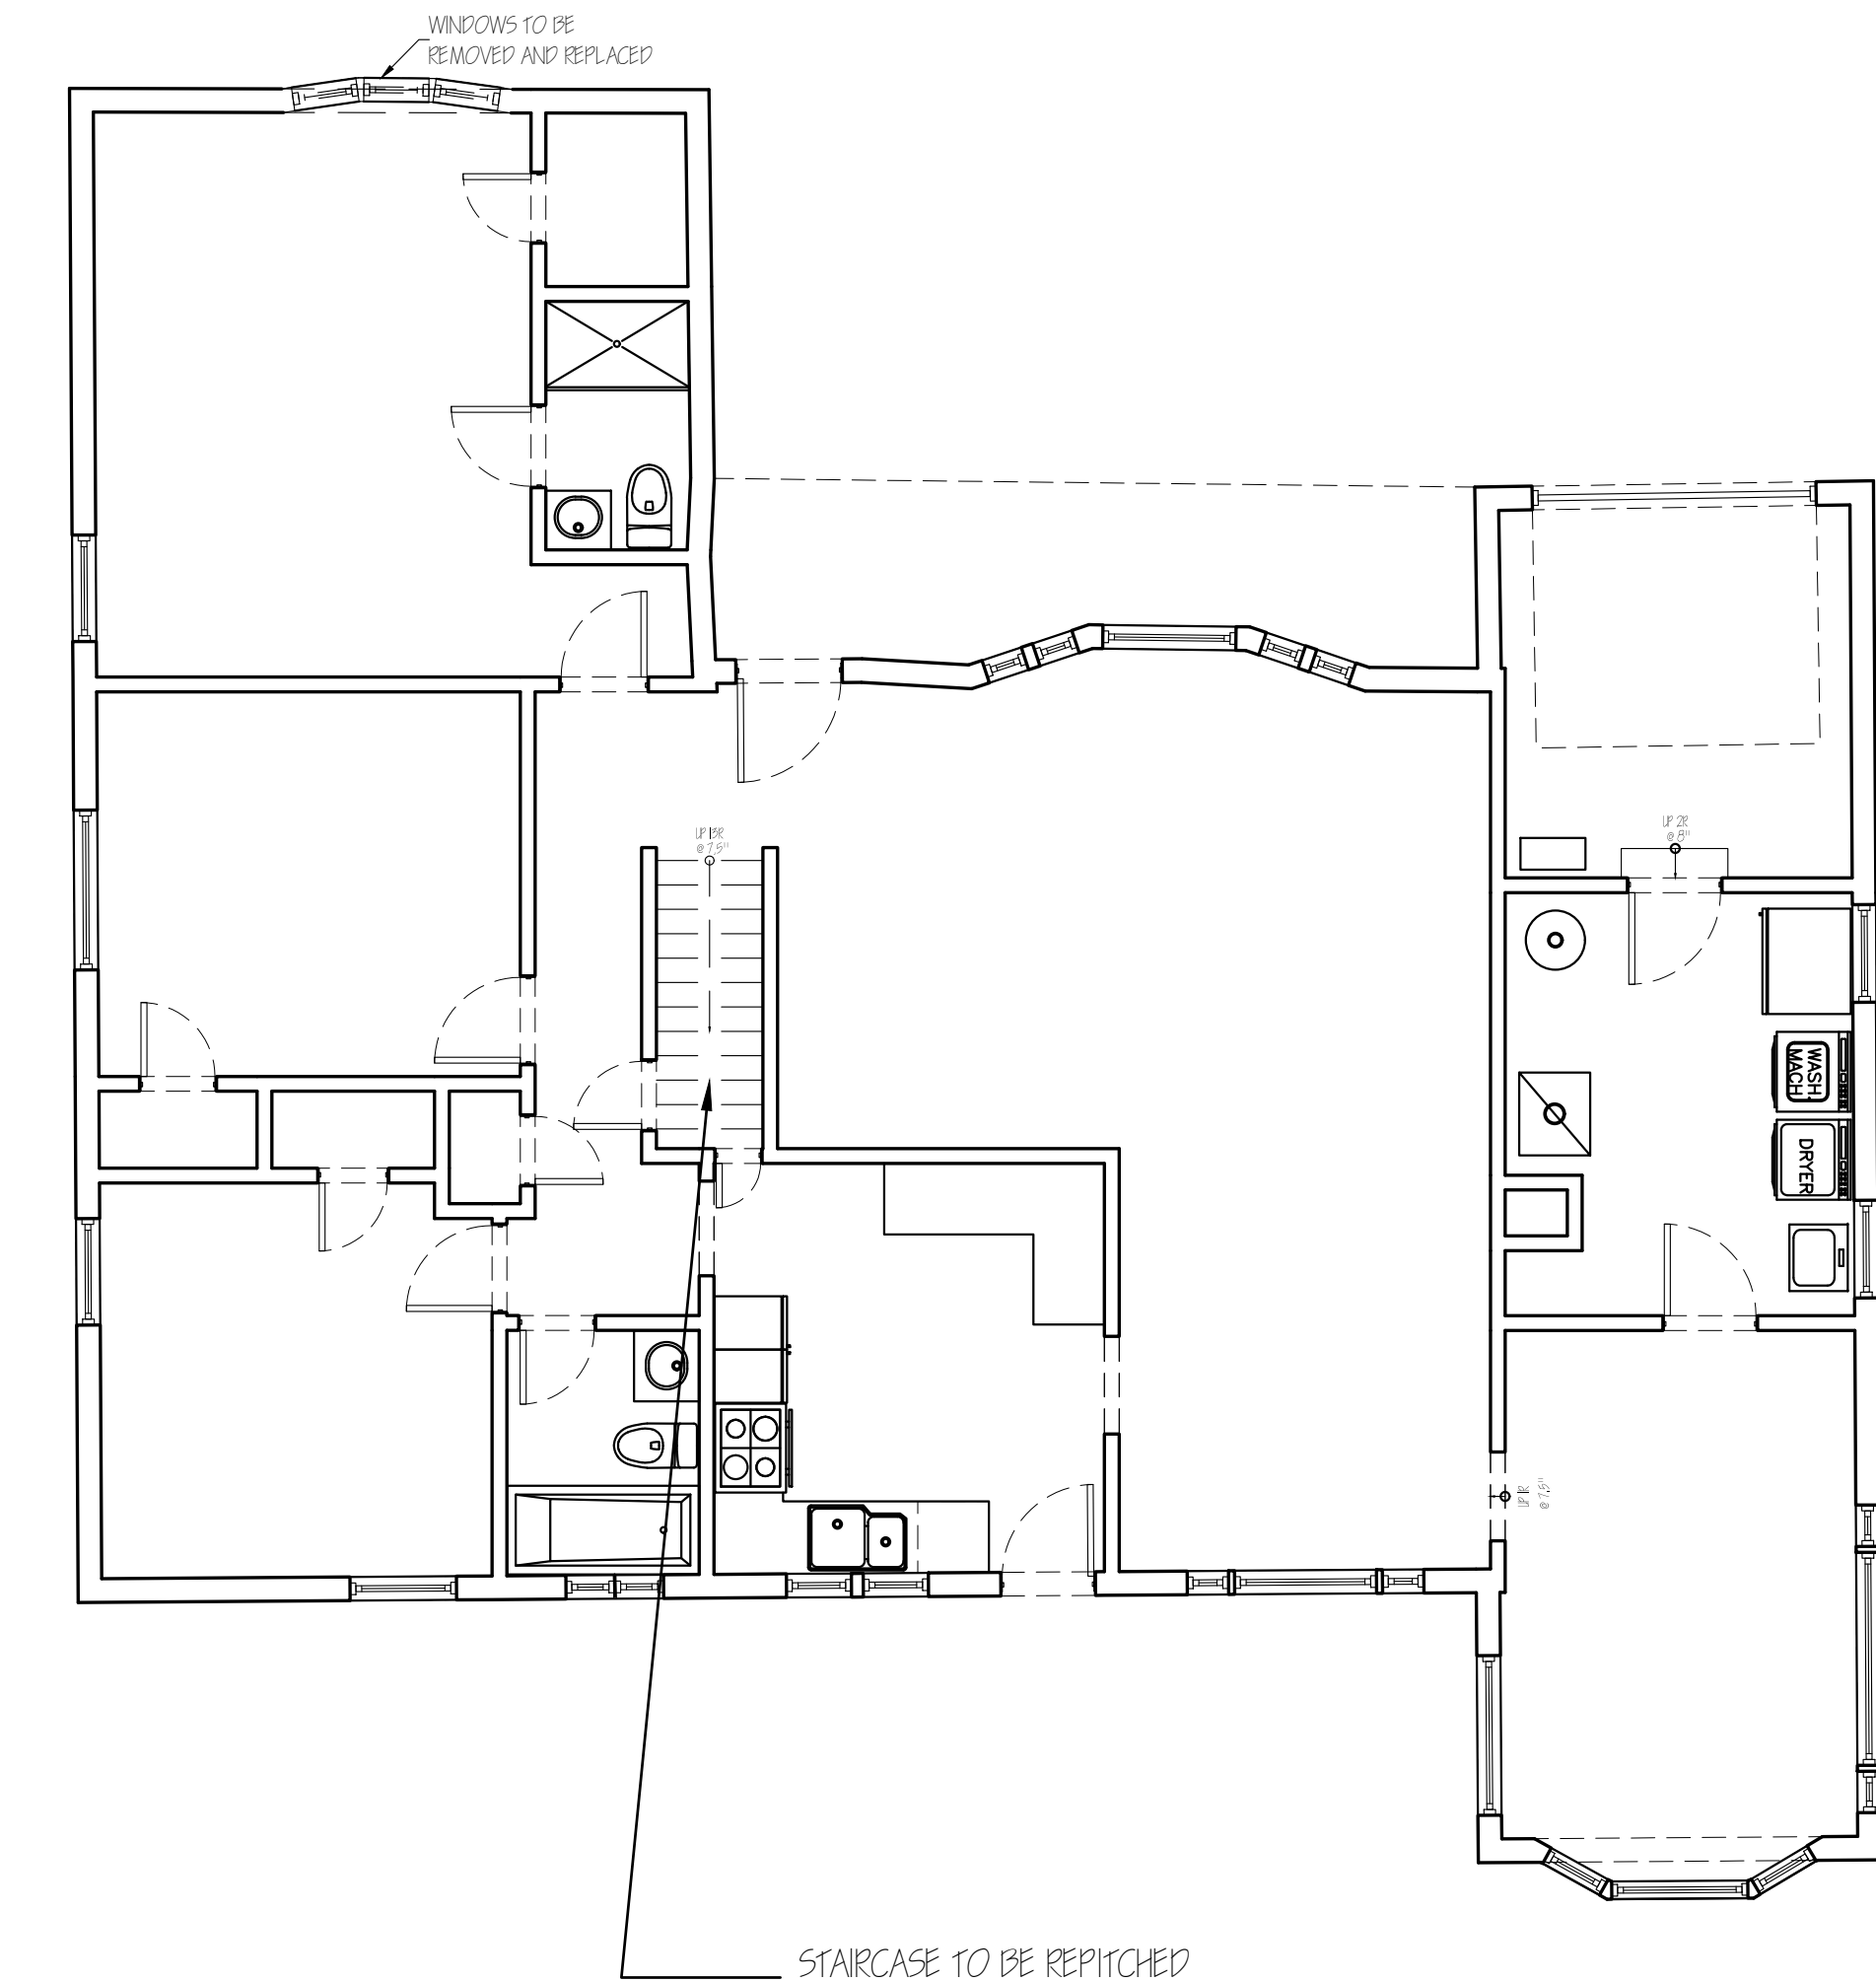

FIRST FLOOR PLAN
(DEMOLITION)
SCALE 3/16"=1'-0"

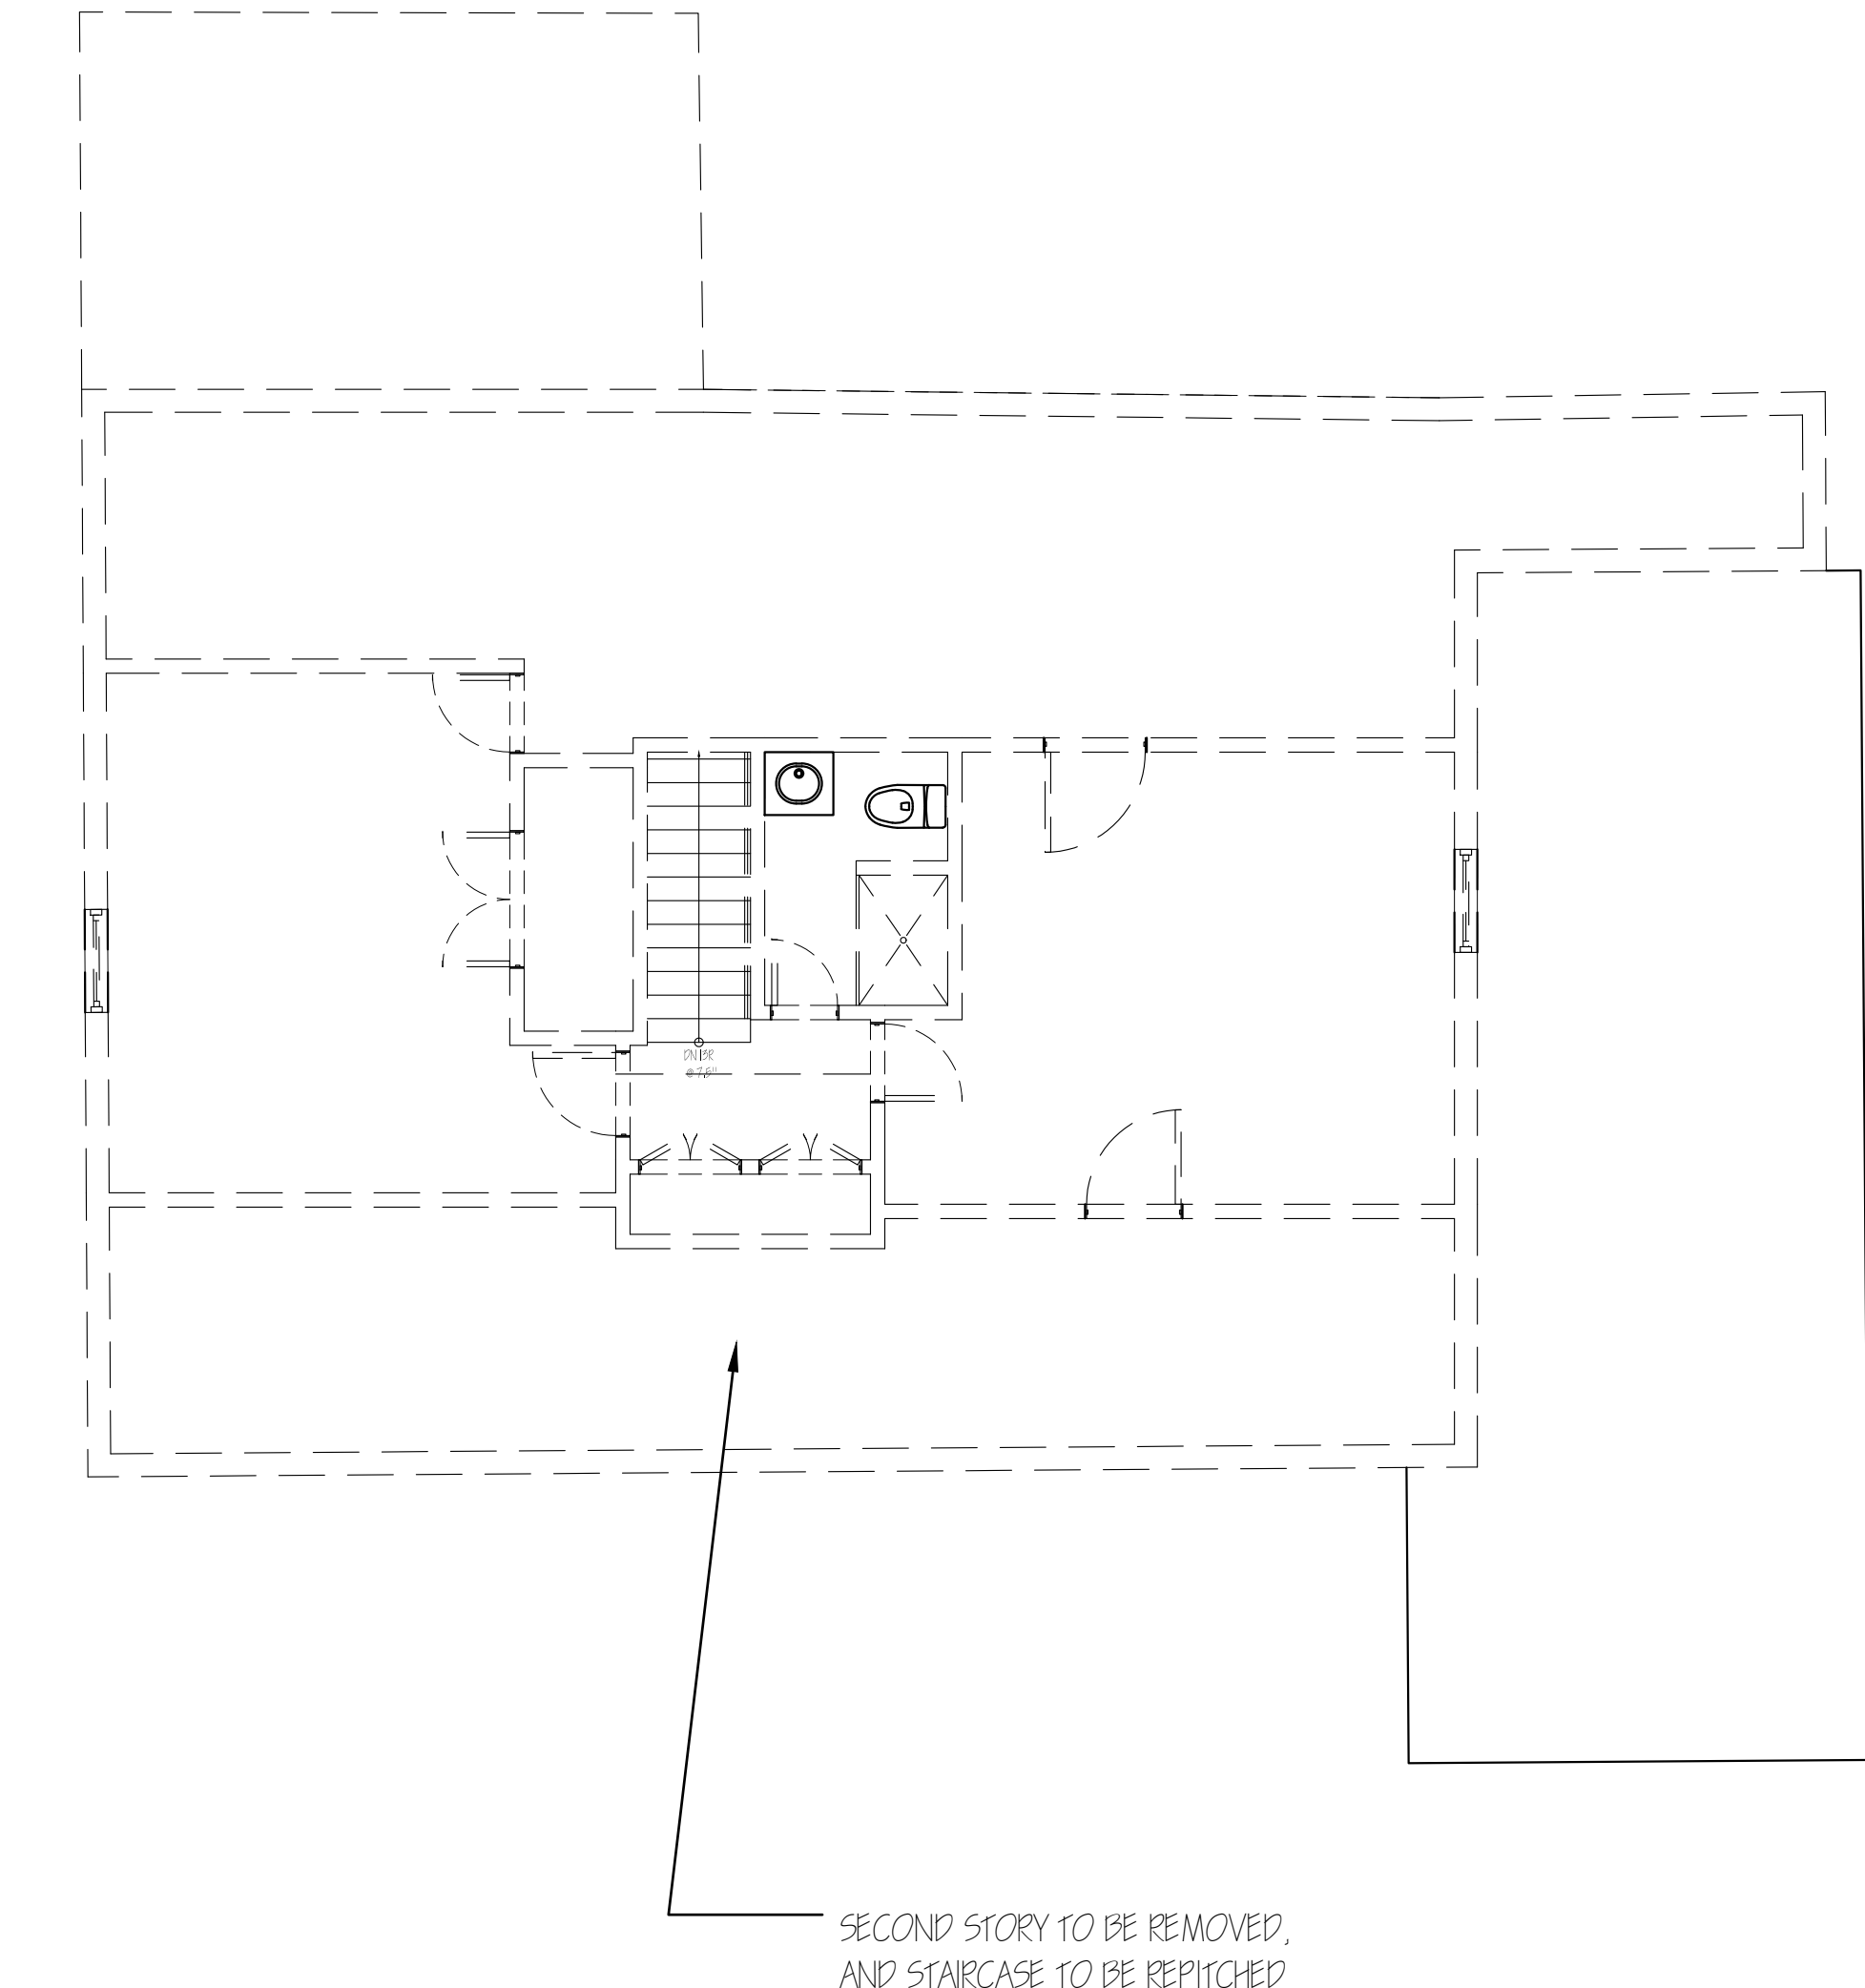

SECOND FLOOR PLAN
(DEMOLITION)
SCALE 3/16"=1'-0"

Shmuel D. Flaum
SDF architect

APPLICANT:

SHMUEL D. FLAUM R.A. NCARB
207 LAWRENCE AVE
INWOOD, NY 11096
(718) 471-5389

DOB APPLICATION NUMBER:

21-3641

DESCRIPTION	DATE	NO.

PROJECT NAME / LOCATION:

819 GLEN DRIVE
WOODMERE, NY 11598
SECTION: 39
BLOCK: 185
LOT: 11

DRAWING TITLE:

CELLAR, FIRST & SECOND
FLOOR DEMOLITION PLANS

EXAMINER'S SIGNATURE

PROFESSIONAL SEAL:



CLIENT: AK
SCALE: AS NOTED
DRAWN BY: AB
CHECKED BY: SDF
DATE: 9/9/22
PROJECT NO. 0335



DM-100.00

DRAWING NO.

4 OF 9

BARCODE

THE GENERAL CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND REPORT ALL ERRORS AND OMISSIONS TO THE ARCHITECTS. DO NOT SCALE DRAWING. THE DRAWING SHALL NOT BE USED UNTIL SIGNED BY CONSULTANTS.

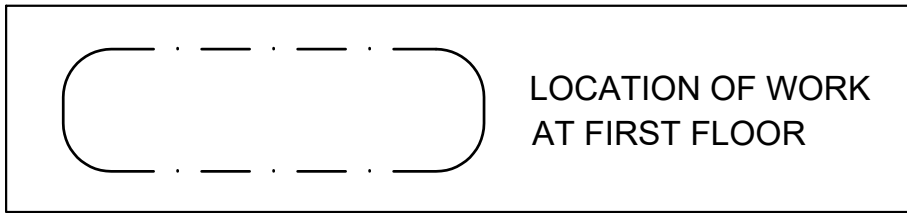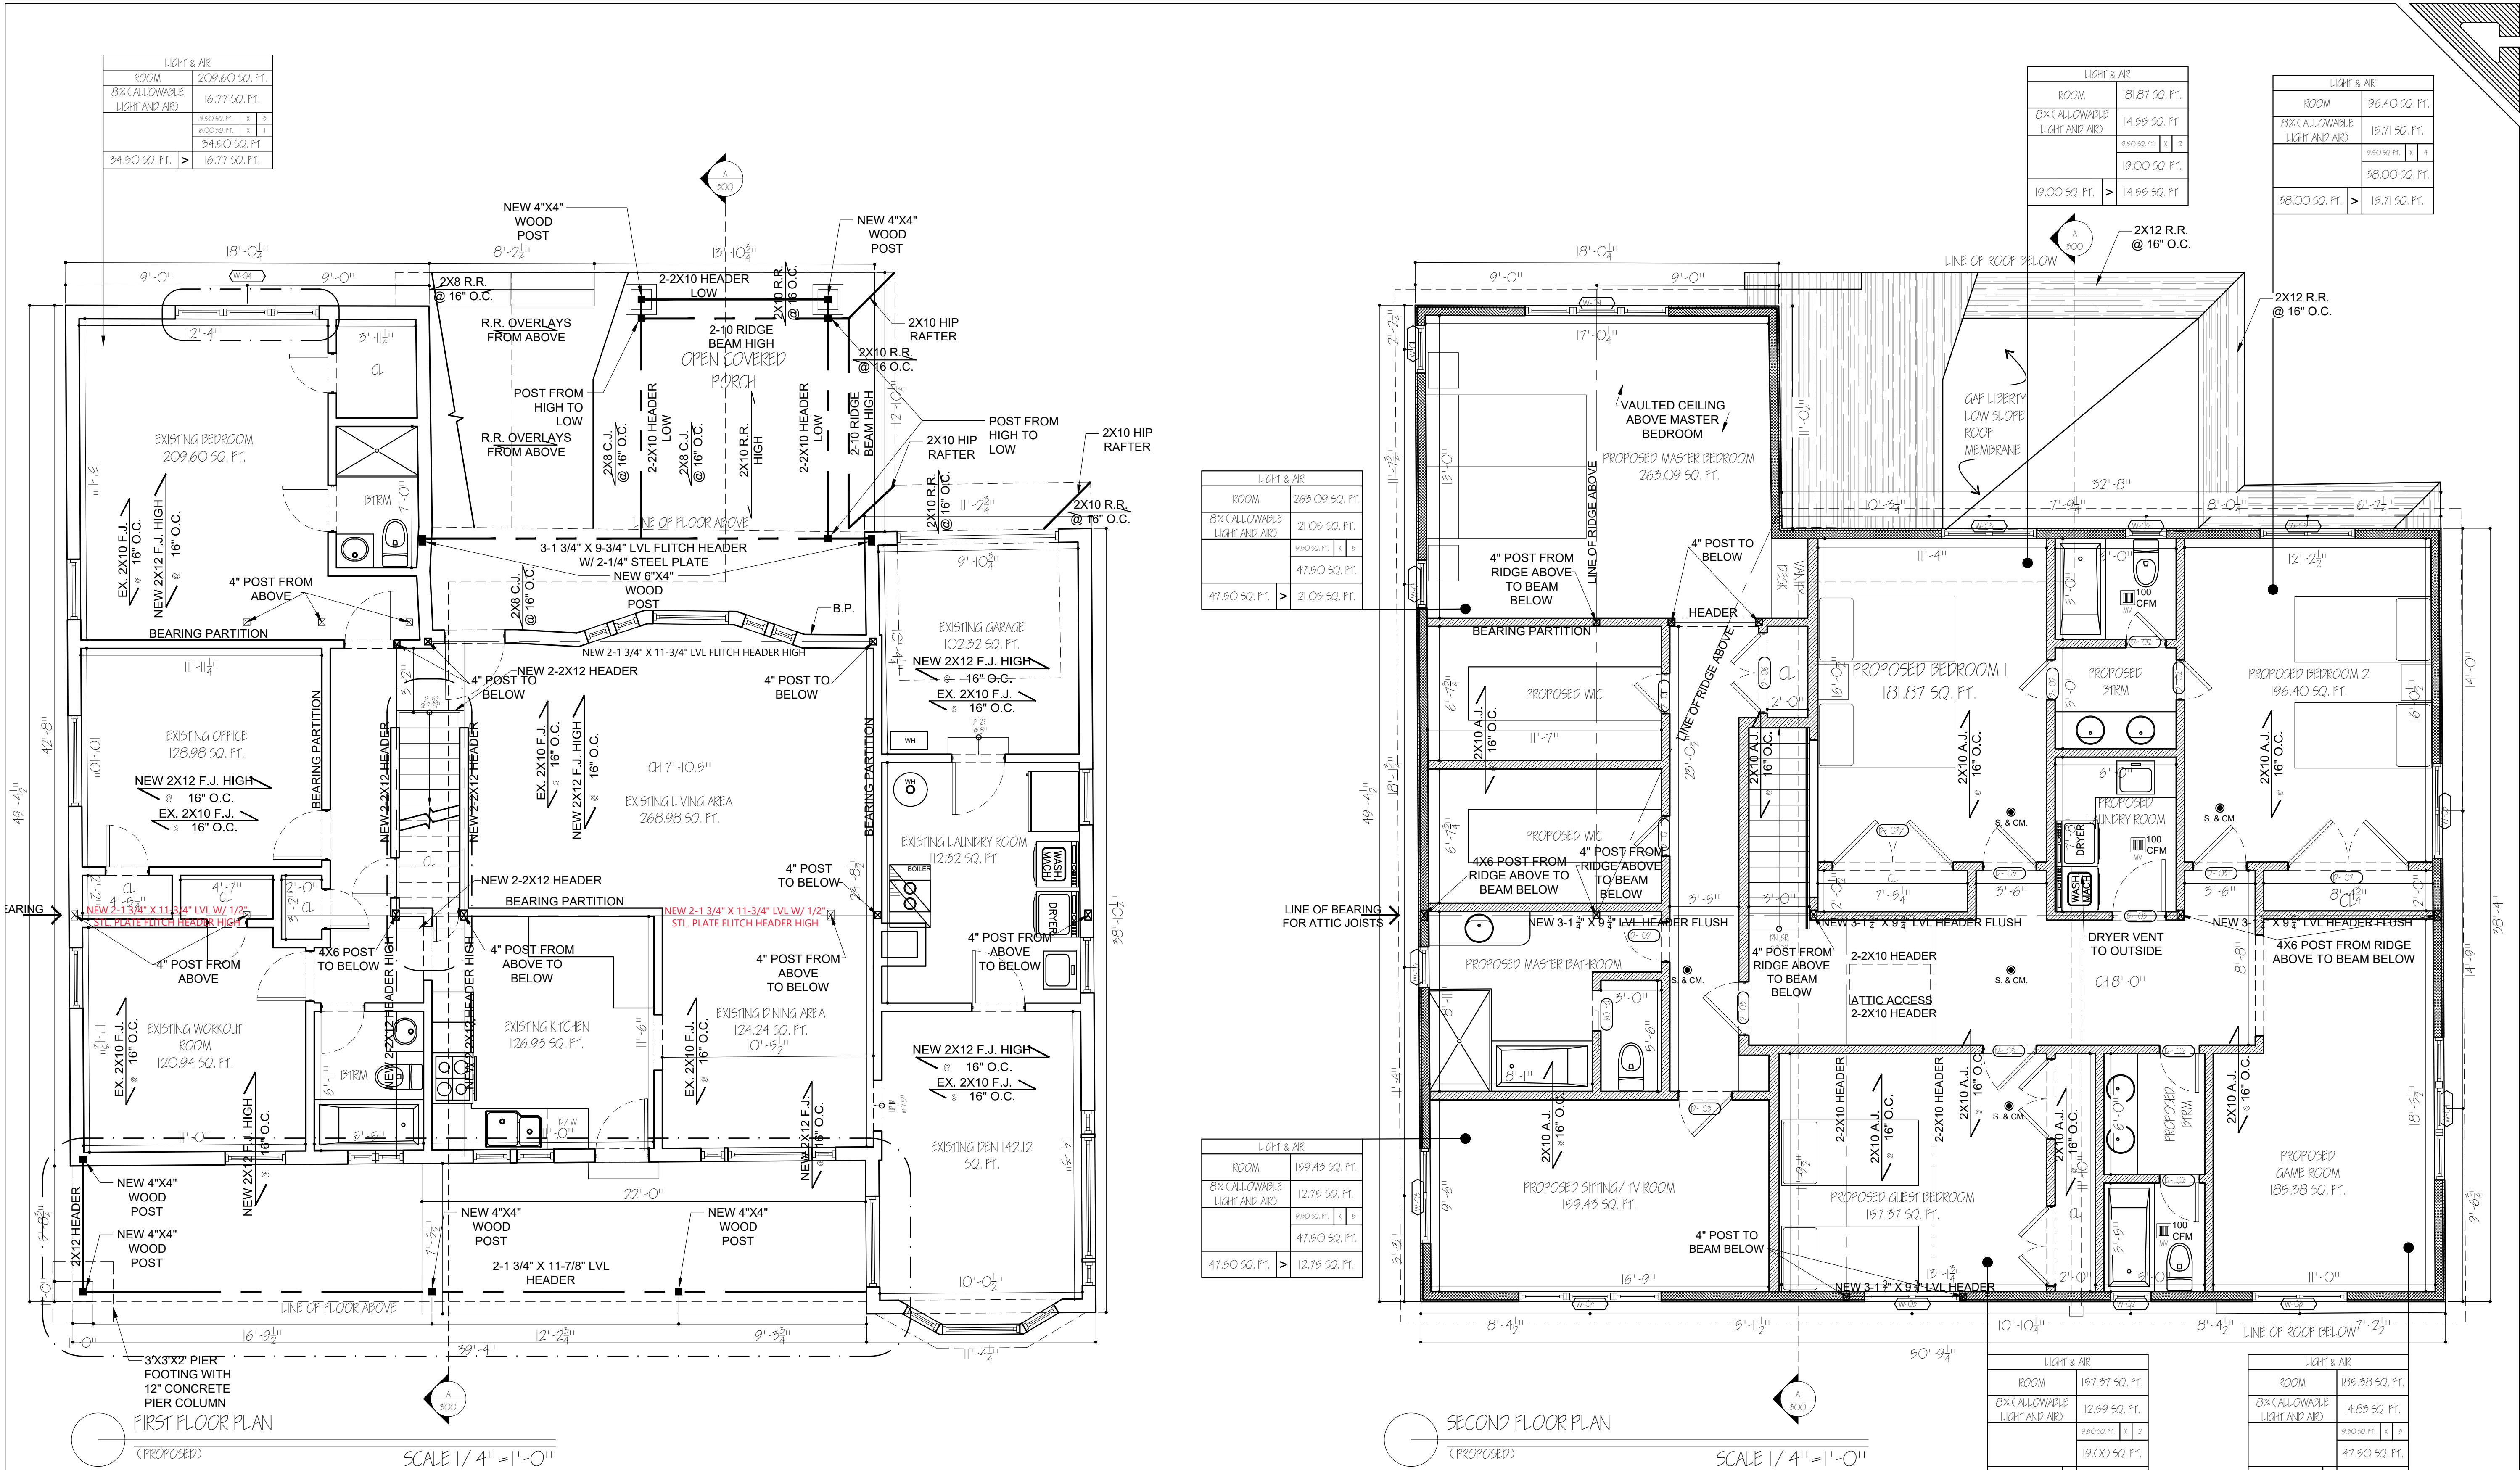

HEADER SCHEDULE	
WALL OPENINGS UP TO 36"	2- 2X8
WALL OPENINGS 36" TO 48"	2- 2X10
WALL OPENINGS 48" TO 72"	2- 2X12
WALL OPENINGS 72" TO 96"	3 1/2" X 9 3/4" LVL

DOOR AND FRAME SCHEDULE				
DOOR #	Style	SIZE	REMARKS	Quantity
01	Standard	2'-0" x 6'-8"	CLOSET	2
02	Standard	2'-0" x 6'-8"	BATHROOM	6
03	Standard	2'-8" x 6'-8"	BEDROOM	5
	Standard	2'-8" x 6'-8"	LAUNDRY	1
04	Pocket	2'-0" x 6'-8"	BATHROOM	1
06	Double	6'-0" x 6'-8"	CLOSET	1
07	Double	6'-0" x 6'-8"	CLOSET	2
				18

WINDOW SCHEDULE					
Number	Width	Height	TYPE	Remarks	Quantity
01	2'-4 1/2"	4'-0"	Casement Windows	MASTER BEDROOM	2
02	2'-0 1/4"	3'-0"	Casement Windows	BATHROOM	3
03	4'-8 1/2"	4'-0"	Twin Casement Windows	BEDROOMS	6
04	2'-0 1/2"	4'-0"	Triple Casement Windows	BEDROOM, TV ROOM, GAME ROOM	4
					15

Shmuel D. Flaum
SDF architect

APPLICANT:
SHMUEL D. FLAUM R.A. NCARB
207 LAWRENCE AVE
INWOOD, NY 11096
(718) 471-5389

DOB APPLICATION NUMBER:
21-3641

DESCRIPTION	DATE	NO.

PROJECT NAME / LOCATION:
819 GLEN DRIVE
WOODMERE, NY 11598
SECTION: 39
BLOCK: 185
LOT: 11

DRAWING TITLE:
PROPOSED FIRST & SECOND
FLOOR PLAN

EXAMINER'S SIGNATURE:

PROFESSIONAL SEAL:

CLIENT:
AS NOTED

SCALE:
AS NOTED

DRAWN BY:
SDF

CHECKED BY:
SDF

DATE:
9/9/22

PROJECT NO.
0335

A-100.00

DRAWING NO.
5 OF 9

BARCODE

THE GENERAL CONTRACTOR SHALL CHECK AND VERIFY ALL
DIMENSIONS AND REPORT ALL ERRORS AND OMISSIONS TO
THE ARCHITECTS. DO NOT SCALE DRAWING. THE DRAWING
SHALL NOT BE USED UNTIL SIGNED BY CONSULTANTS.



DOR APPLICATION NUMBER

21-3641

[illegible]

PROJECT NAME / LOCATION

819 GLEN DRIVE
WOODMERE, NY 11598
SECTION: 39
BLOCK: 185
LOT: 11

DRAWING TITLE

PROPOSED ROOF PLAN

EXAMINER'S SIGNATURE _____

PROFESSIONAL SEAL



A4

AS NOTED

A. E.

SDR

/22

0335


2




A-101.00

DRAWING NO. 6 OF 9

ARCOO

THE GENERAL CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND REPORT ALL ERRORS AND OMISSIONS TO THE ARCHITECTS. DO NOT SCALE DRAWING. THE DRAWING SHALL NOT BE USED UNTIL SIGNED BY CONSULTANTS.

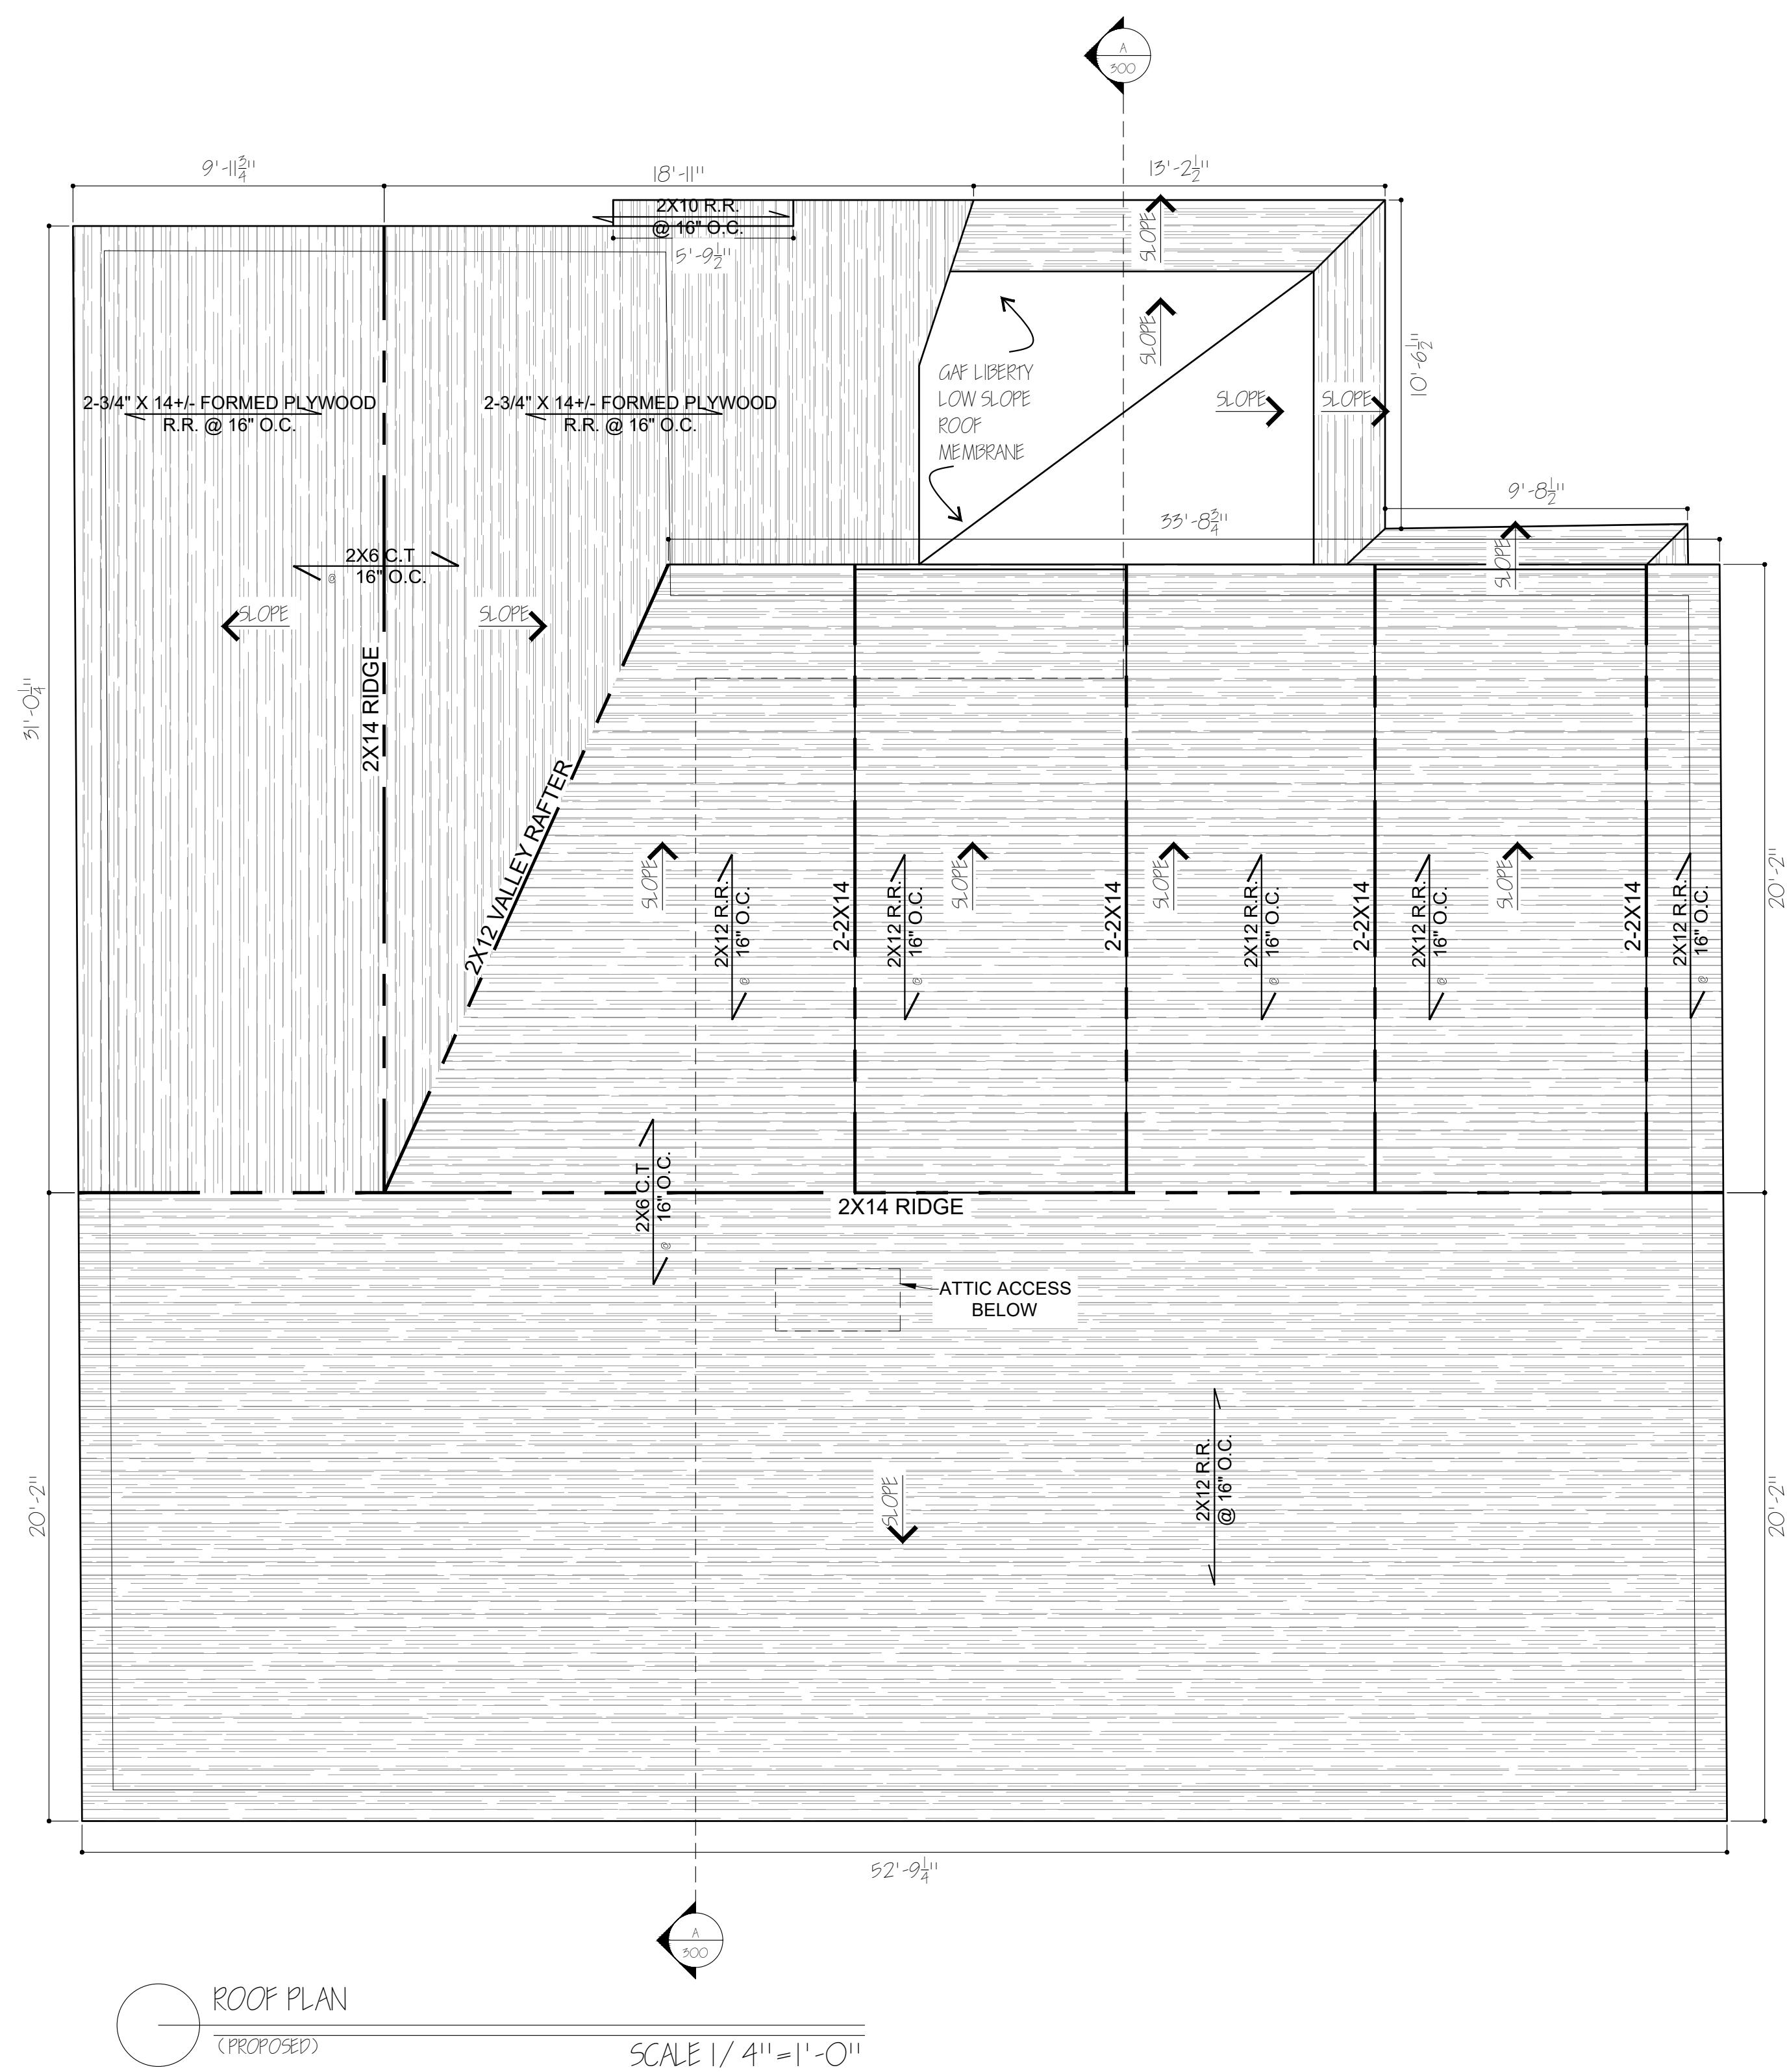

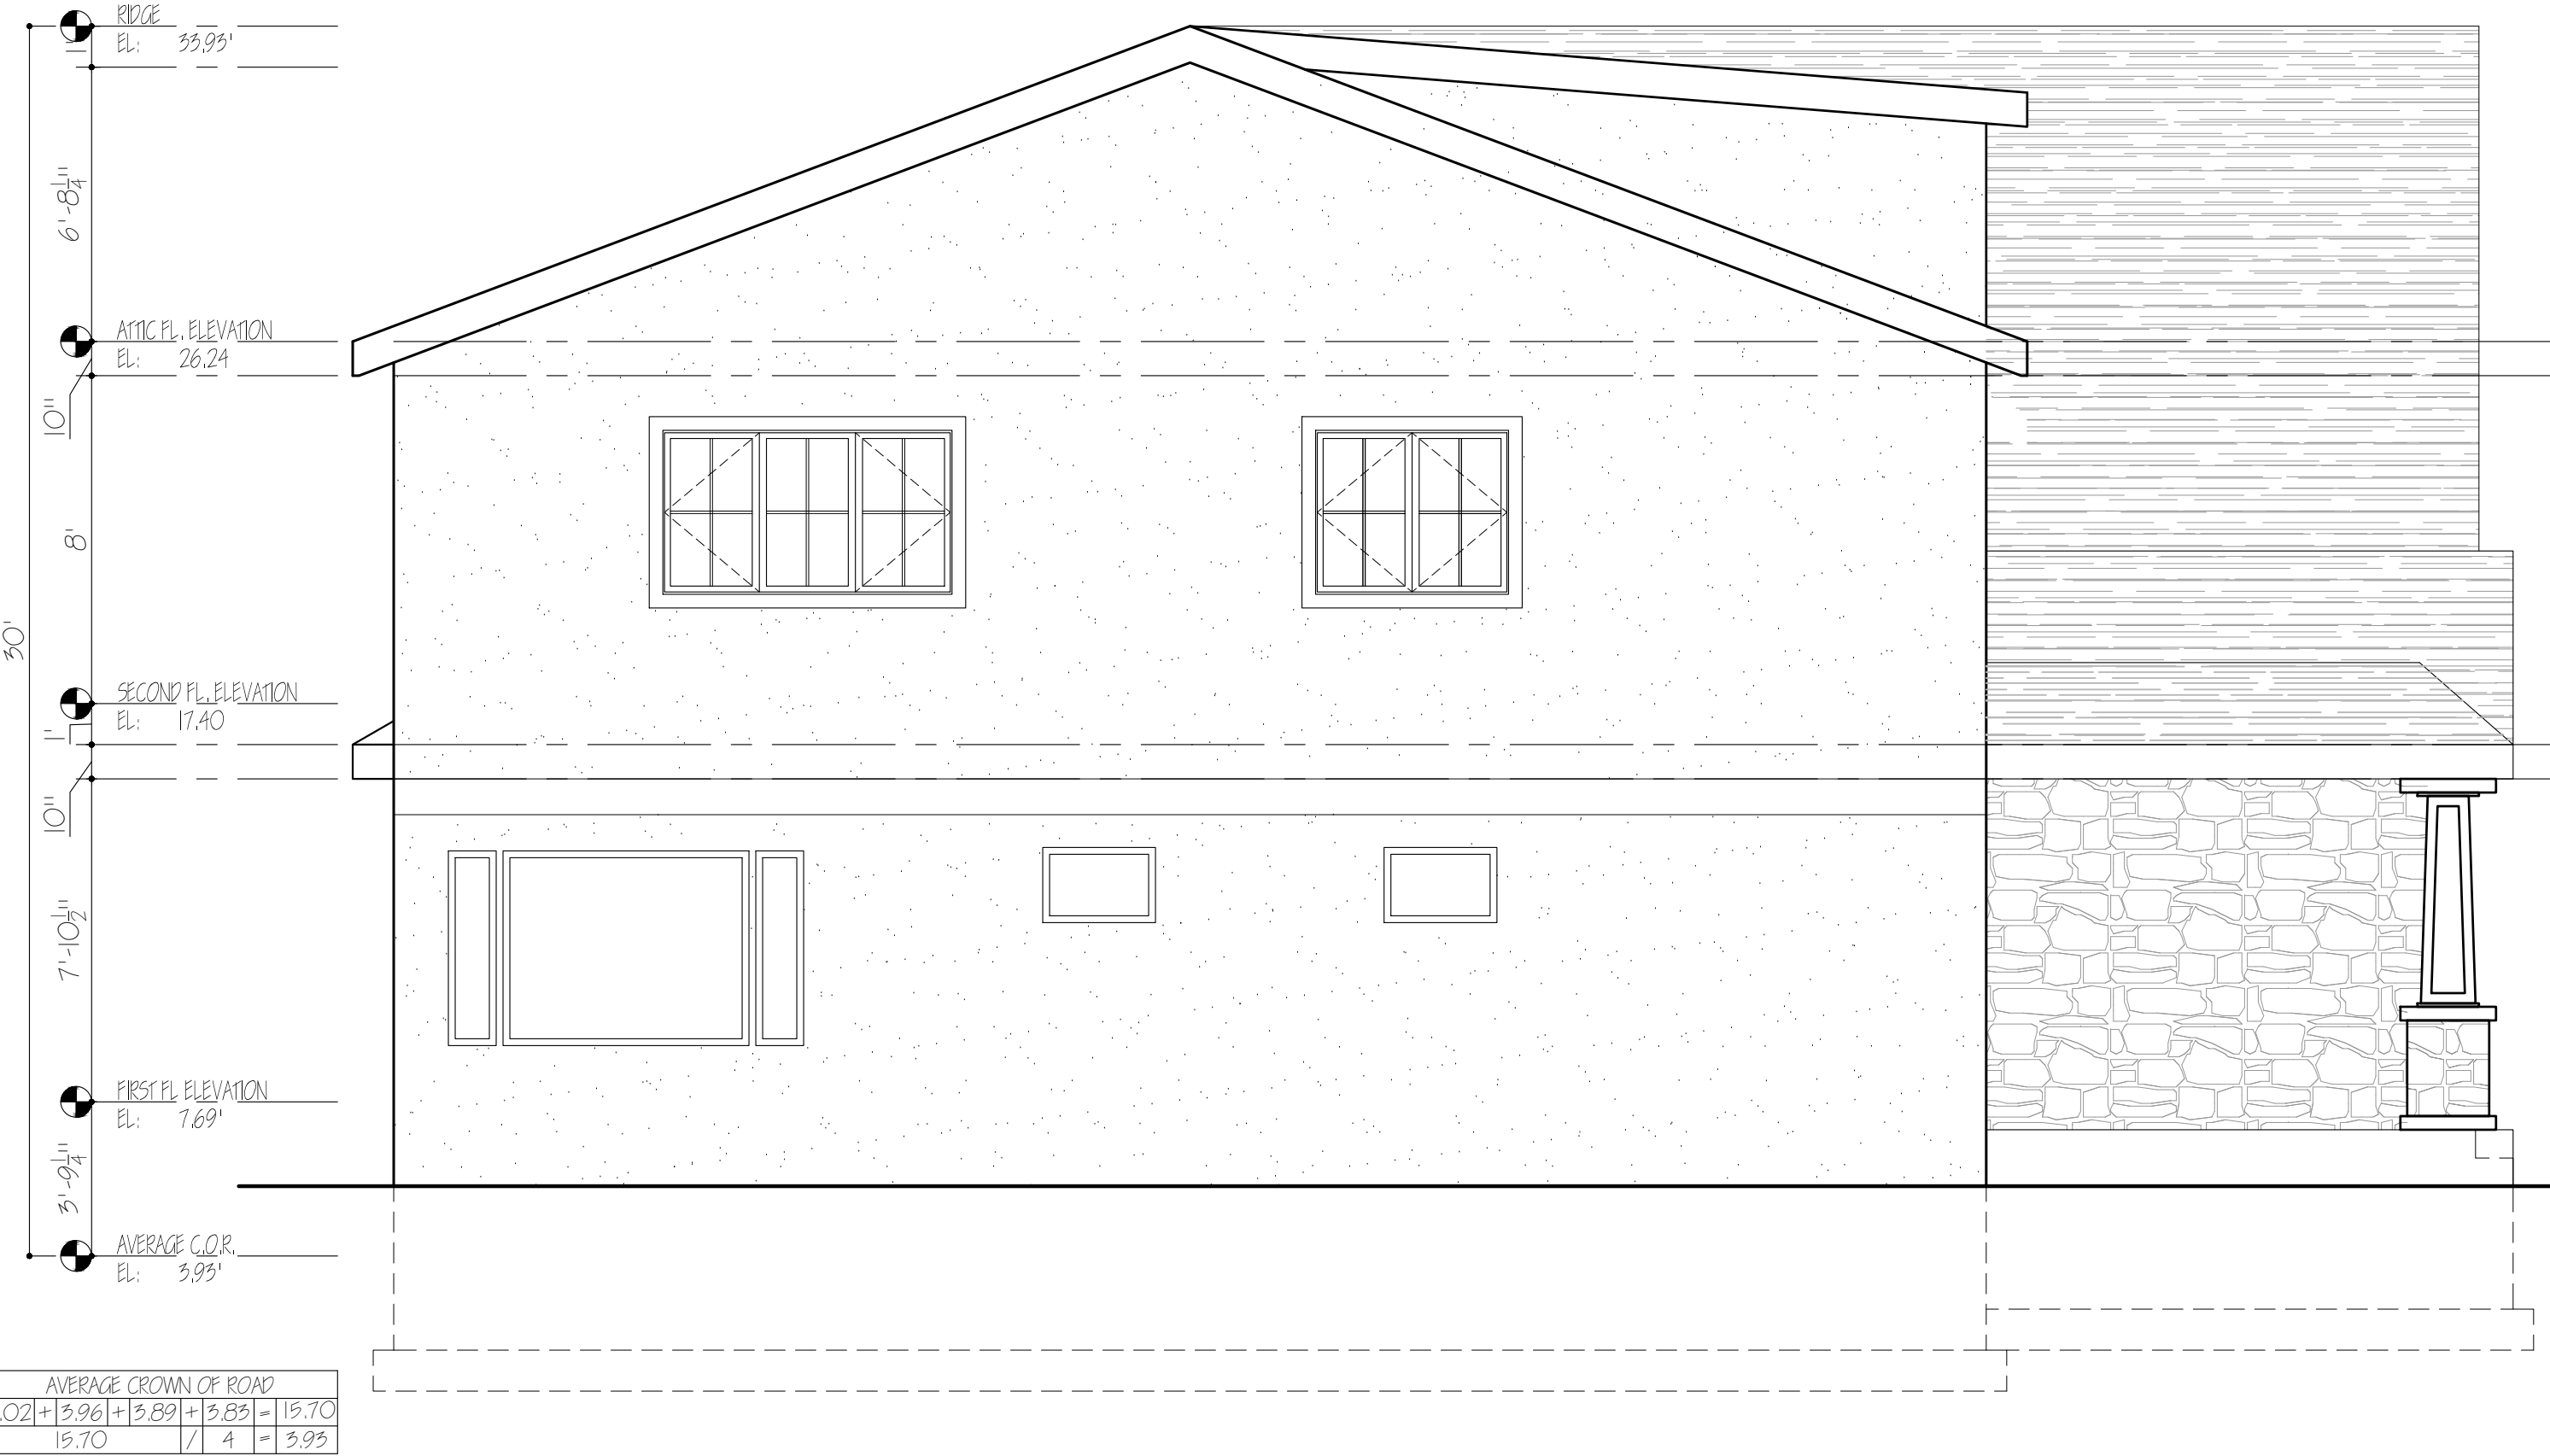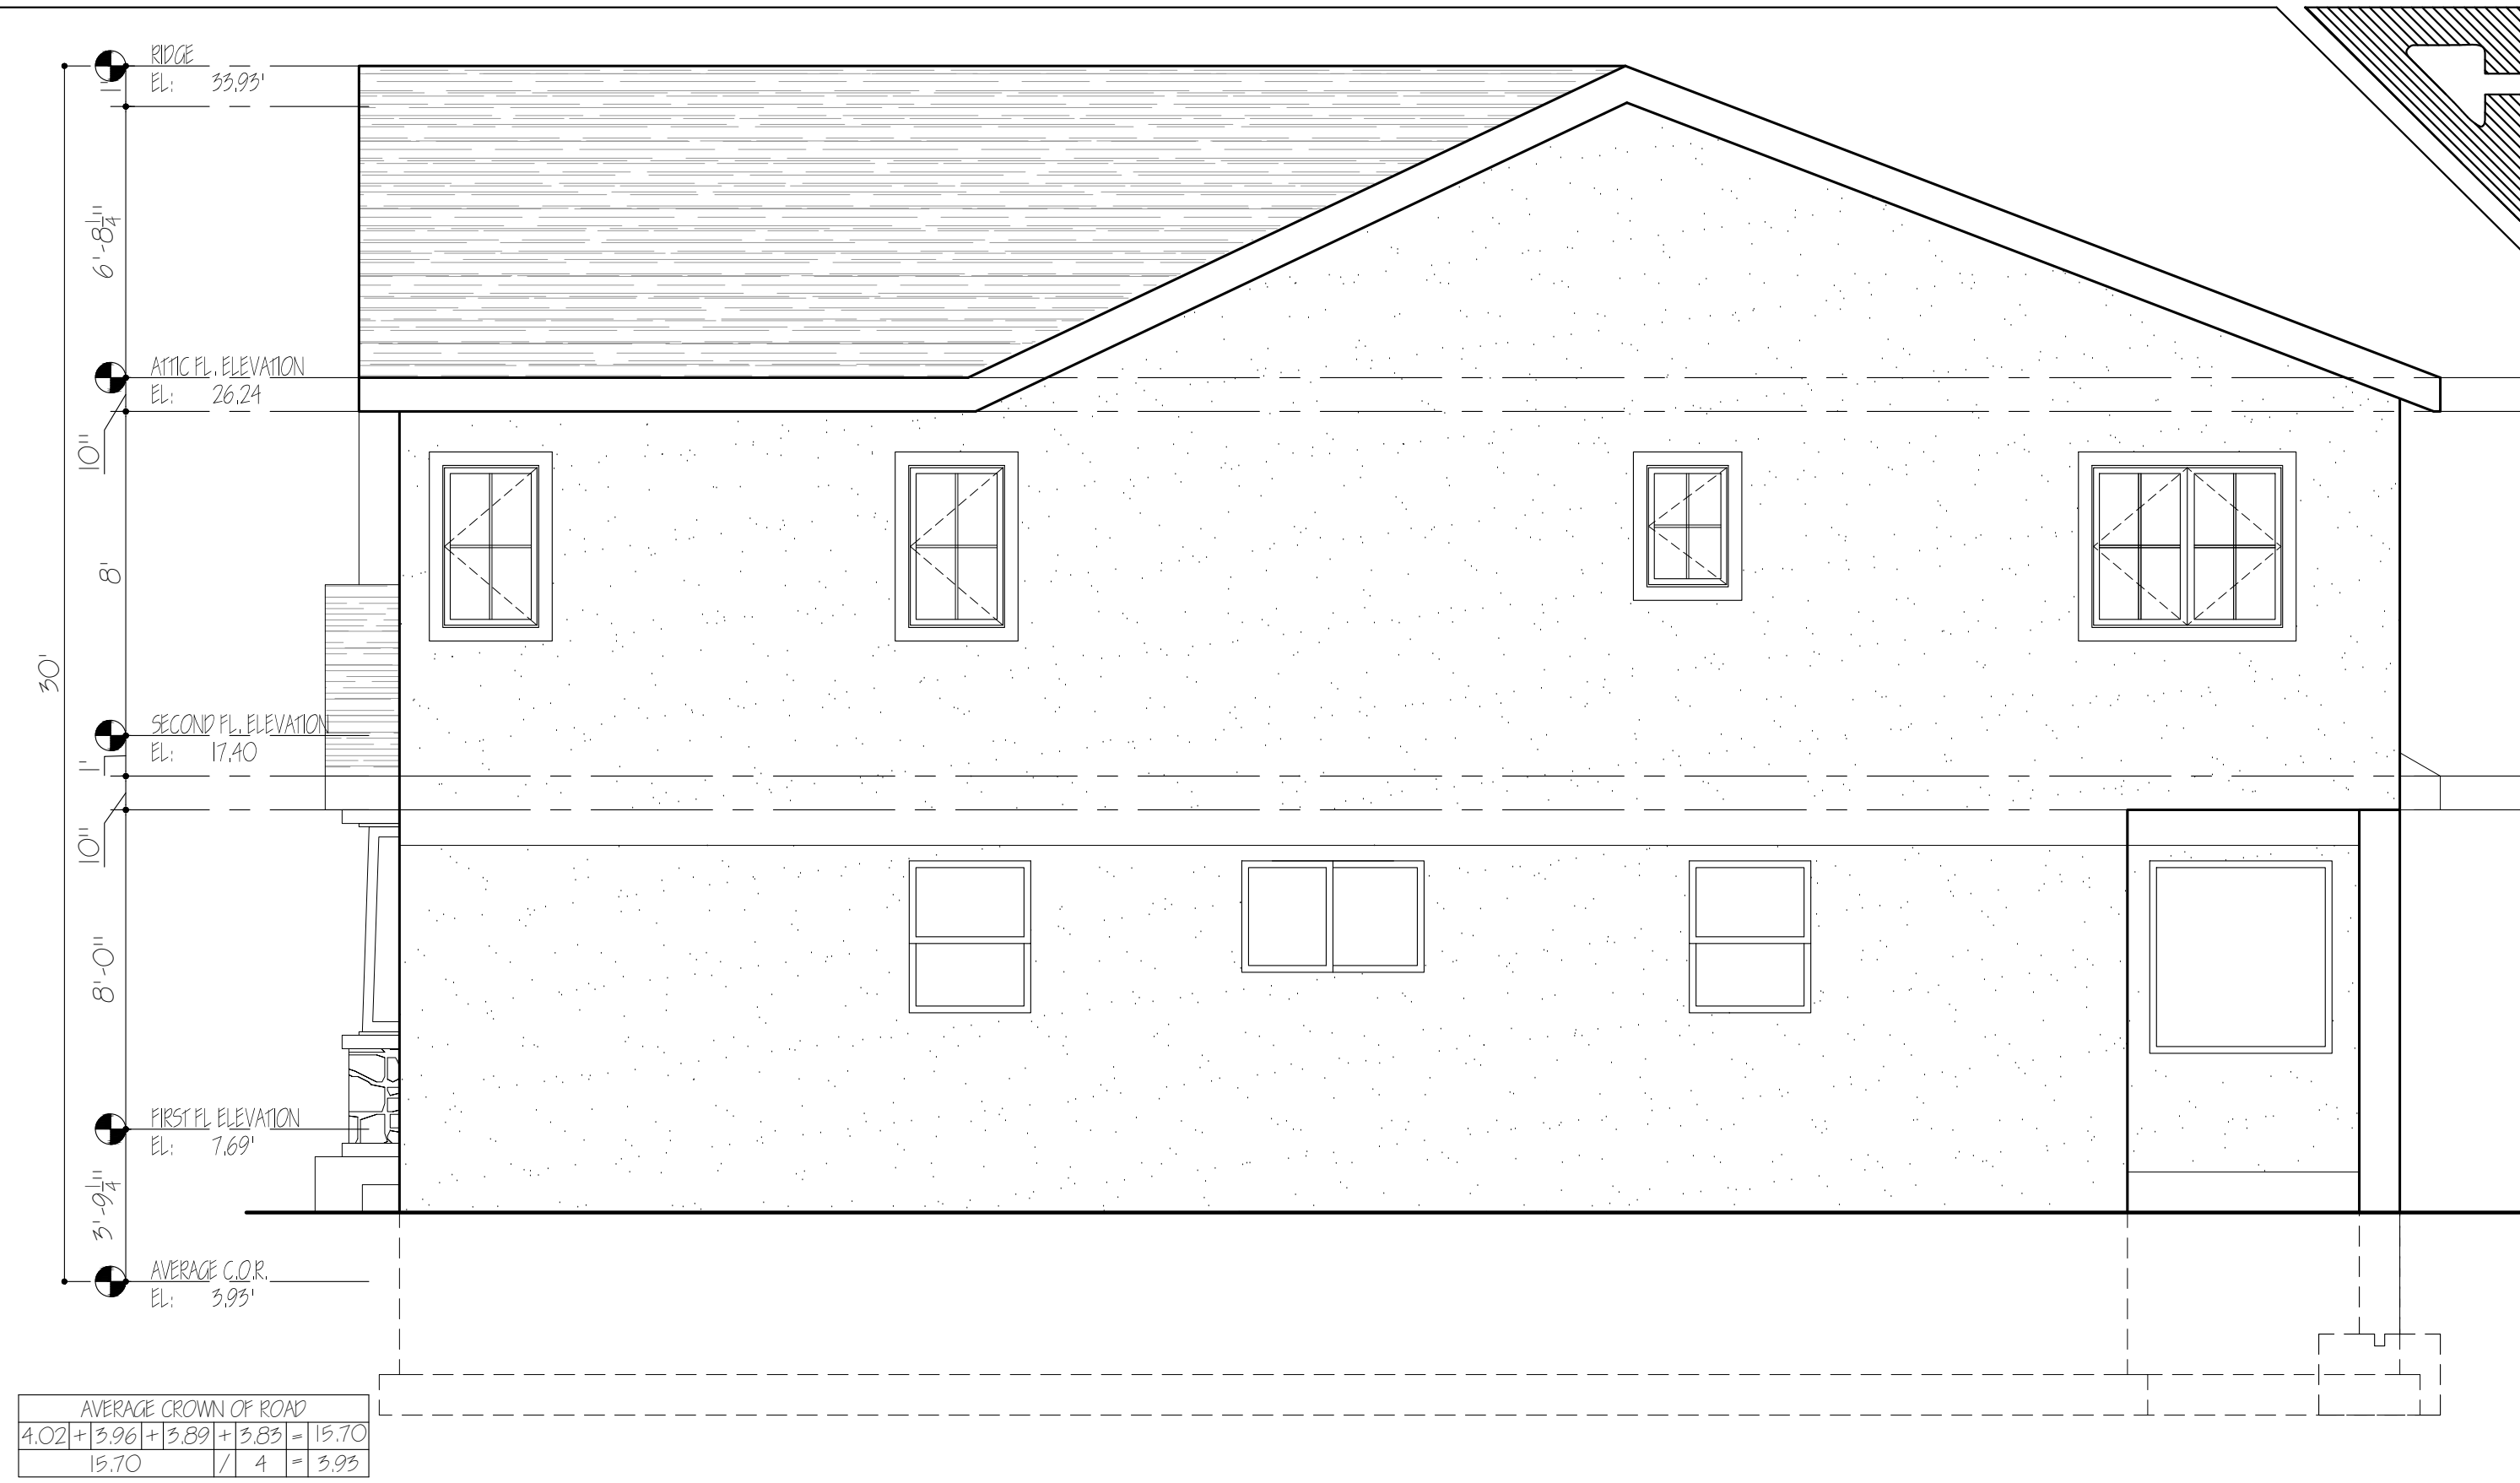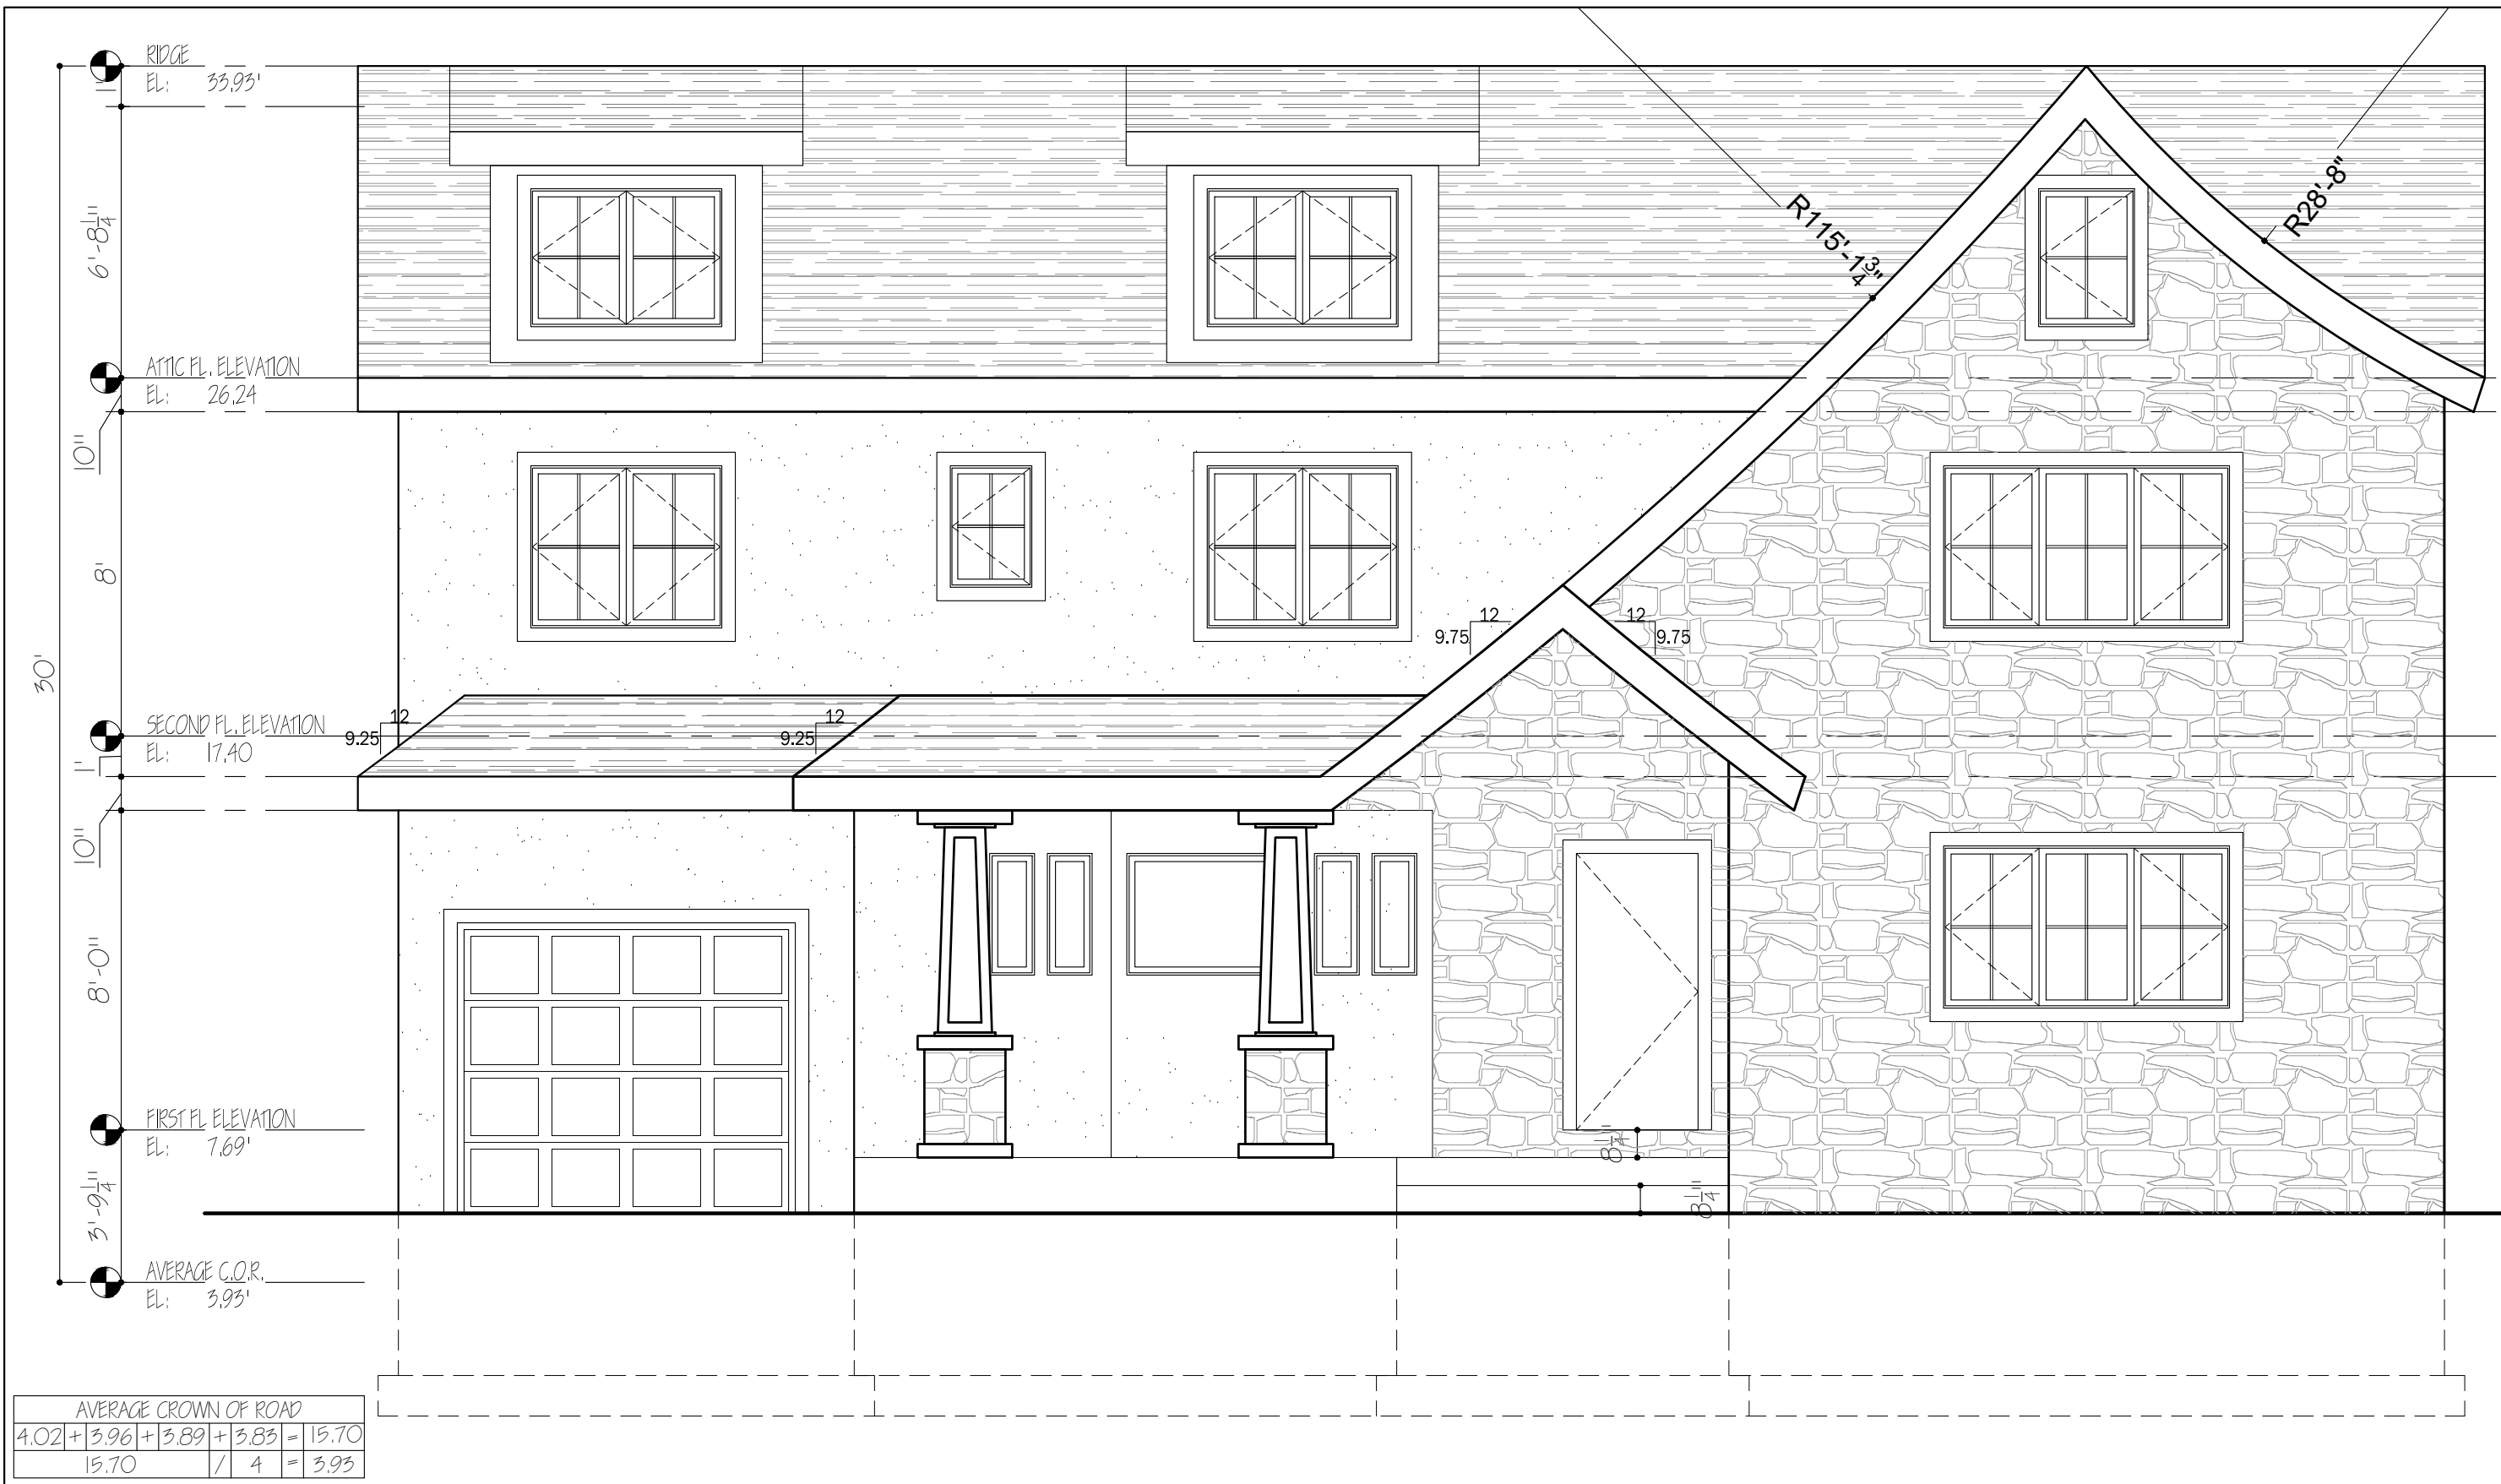

Shmuel D. Flaum
SDF architect

APPLICANT:

SHMUEL D. FLAUM R.A. NCARB
207 LAWRENCE AVE
INWOOD, NY 11096
(718) 471-5389

DOB APPLICATION NUMBER:

21-3641

DESCRIPTION	DATE	NO.

PROJECT NAME / LOCATION:

819 GLEN DRIVE
WOODMERE, NY 11598
SECTION: 39
BLOCK: 185
LOT: 11

DRAWING TITLE:

PROPOSED ELEVATIONS

EXAMINER'S SIGNATURE

PROFESSIONAL SEAL:



CLIENT: AK
SCALE: AS NOTED
DRAWN BY: AR
CHECKED BY: SDF
DATE: 9/9/22
PROJECT NO.: 0335


A-200.00

DRAWING NO.

7 OF 9

BARCODE

THE GENERAL CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND REPORT ALL ERRORS AND OMISSIONS TO THE ARCHITECTS. DO NOT SCALE DRAWING. THE DRAWING SHALL NOT BE USED UNTIL SIGNED BY CONSULTANTS.

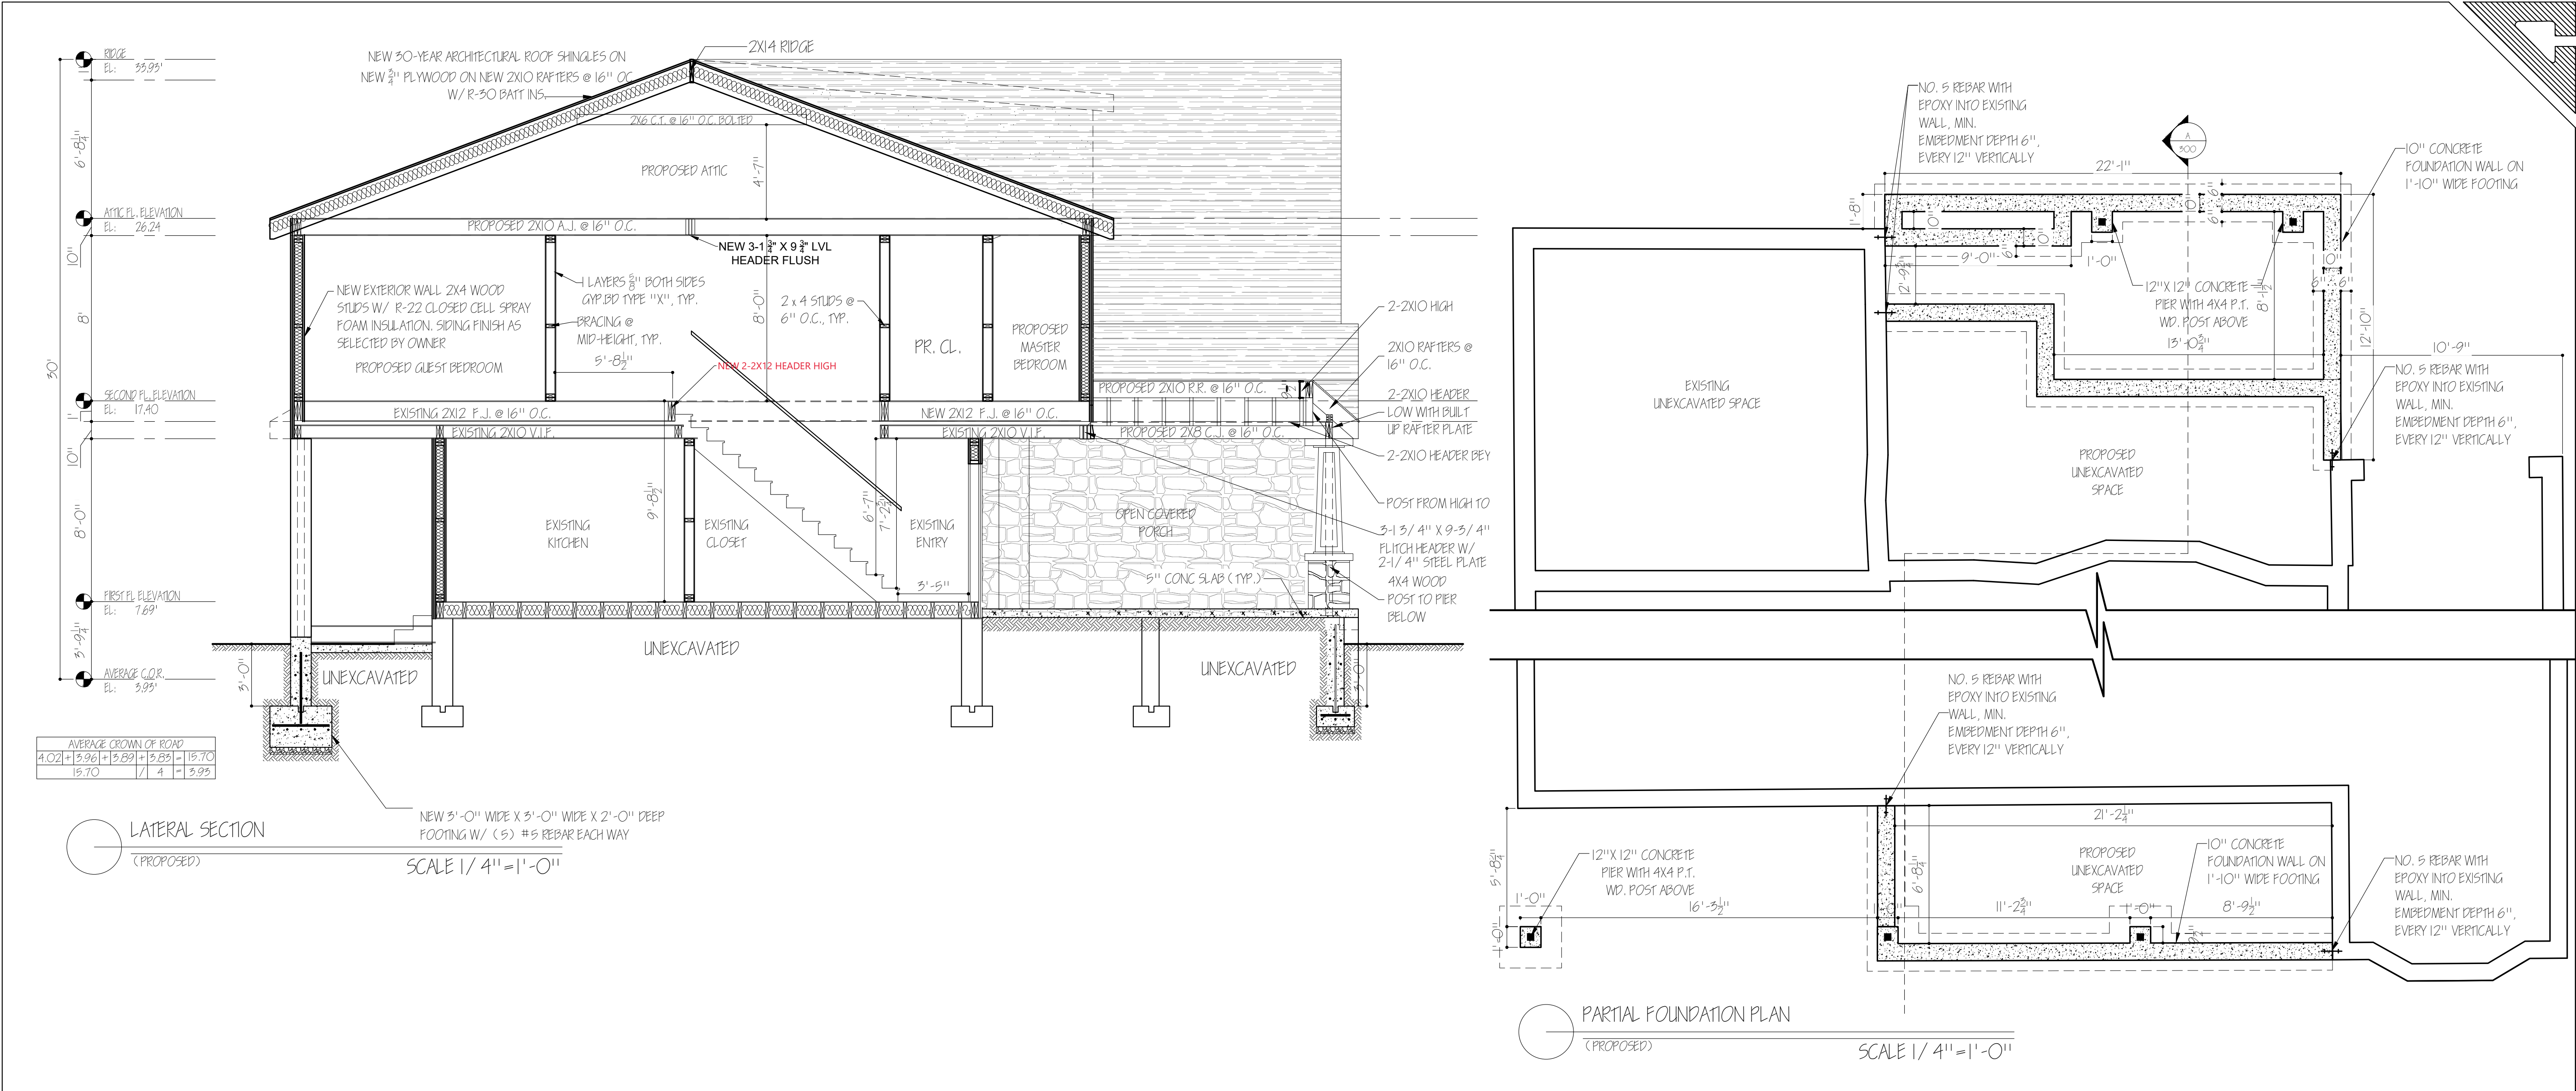

Shmuel D. Flaum

SDF

architect

APPLICANT:

SHMUEL D. FLAUM R.A. NCARB

207 LAWRENCE AVE

INWOOD, NY 11096

(718) 471-5389

DOB APPLICATION NUMBER:

21-3641

PROJECT NAME / LOCATION:

819 GLEN DRIVE

WOODMERE, NY 11598

SECTION: 39

BLOCK: 185

LOT: 11

DRAWING TITLE:

PROPOSED SECTION AND WALL DETAILS

EXAMINER'S SIGNATURE

PROFESSIONAL SEAL:

REGISTERED ARCHITECT

SHMUEL DOVID FLAUM

034658

STATE OF NEW YORK

CLIENT:

AK

SCALE:

AS NOTED

DRAWN BY:

AR

CHECKED BY:

SDF

DATE:

9/9/22

PROJECT NO.

0335

DRAWING NO.

A-300.00

8 OF 9

BARCODE

THE GENERAL CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND REPORT ALL ERRORS AND OMISSIONS TO THE ARCHITECTS. DO NOT SCALE DRAWING. THE DRAWING SHALL NOT BE USED UNTIL SIGNED BY CONSULTANTS.

APPLICANT:

SHMUEL D. FLAUM R.A. NCARB
207 LAWRENCE AVE
INWOOD, NY 11096
(718) 471-5389

DOB APPLICATION NUMBER:

21-3641

DESCRIPTION	DATE	NO.

PROJECT NAME / LOCATION:

819 GLEN DRIVE
WOODMERE, NY 11598
SECTION: 39
BLOCK: 185
LOT: 11

DRAWING TITLE:

PLUMBING & GAS RISER
DIAGRAM

EXAMINER'S SIGNATURE

PROFESSIONAL SEAL:



CLIENT: AK
SCALE: AS NOTED
DRAWN BY: AB
CHECKED BY: SDF
DATE: 9/9/22
PROJECT NO. 0335


P-100.00

DRAWING NO.

9 OF 9


BARCODE

THE GENERAL CONTRACTOR SHALL CHECK AND VERIFY ALL
DIMENSIONS AND REPORT ALL ERRORS AND OMISSIONS TO
THE ARCHITECTS. DO NOT SCALE DRAWING. THE DRAWING
SHALL NOT BE USED UNTIL SIGNED BY CONSULTANTS.

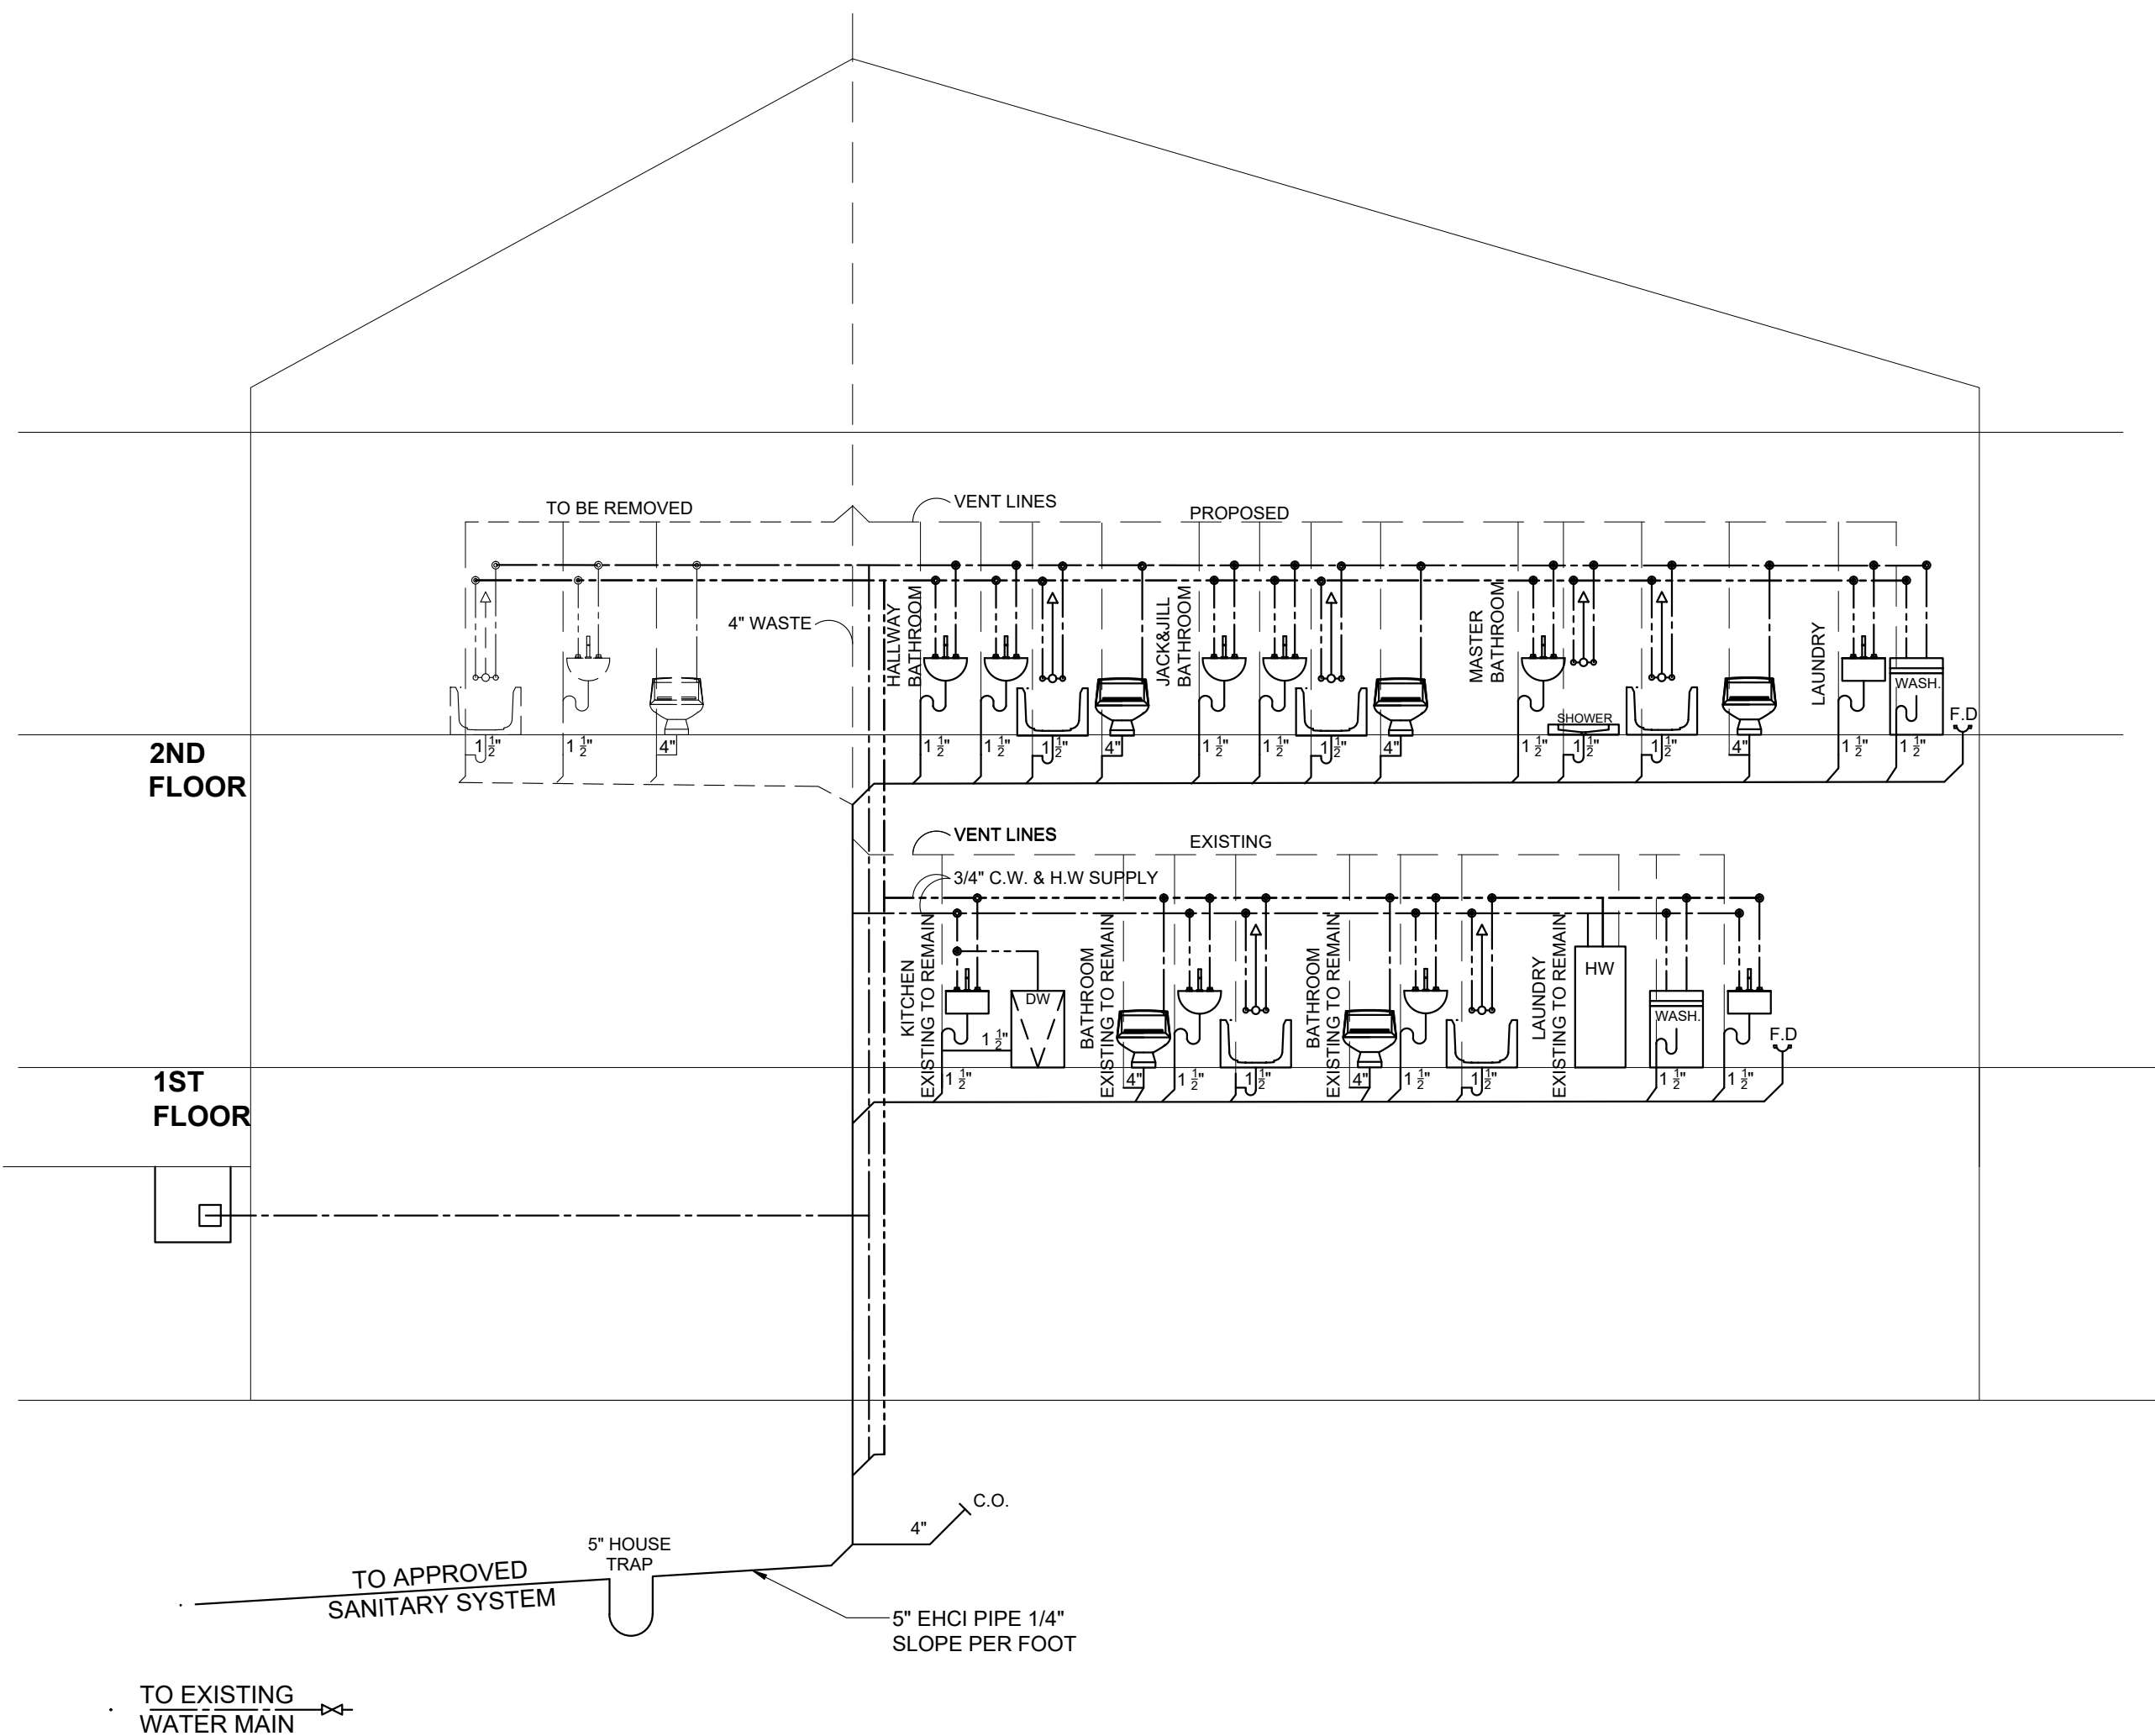

PLUMBING RISER DIAGRAM

SCALE N.T.S

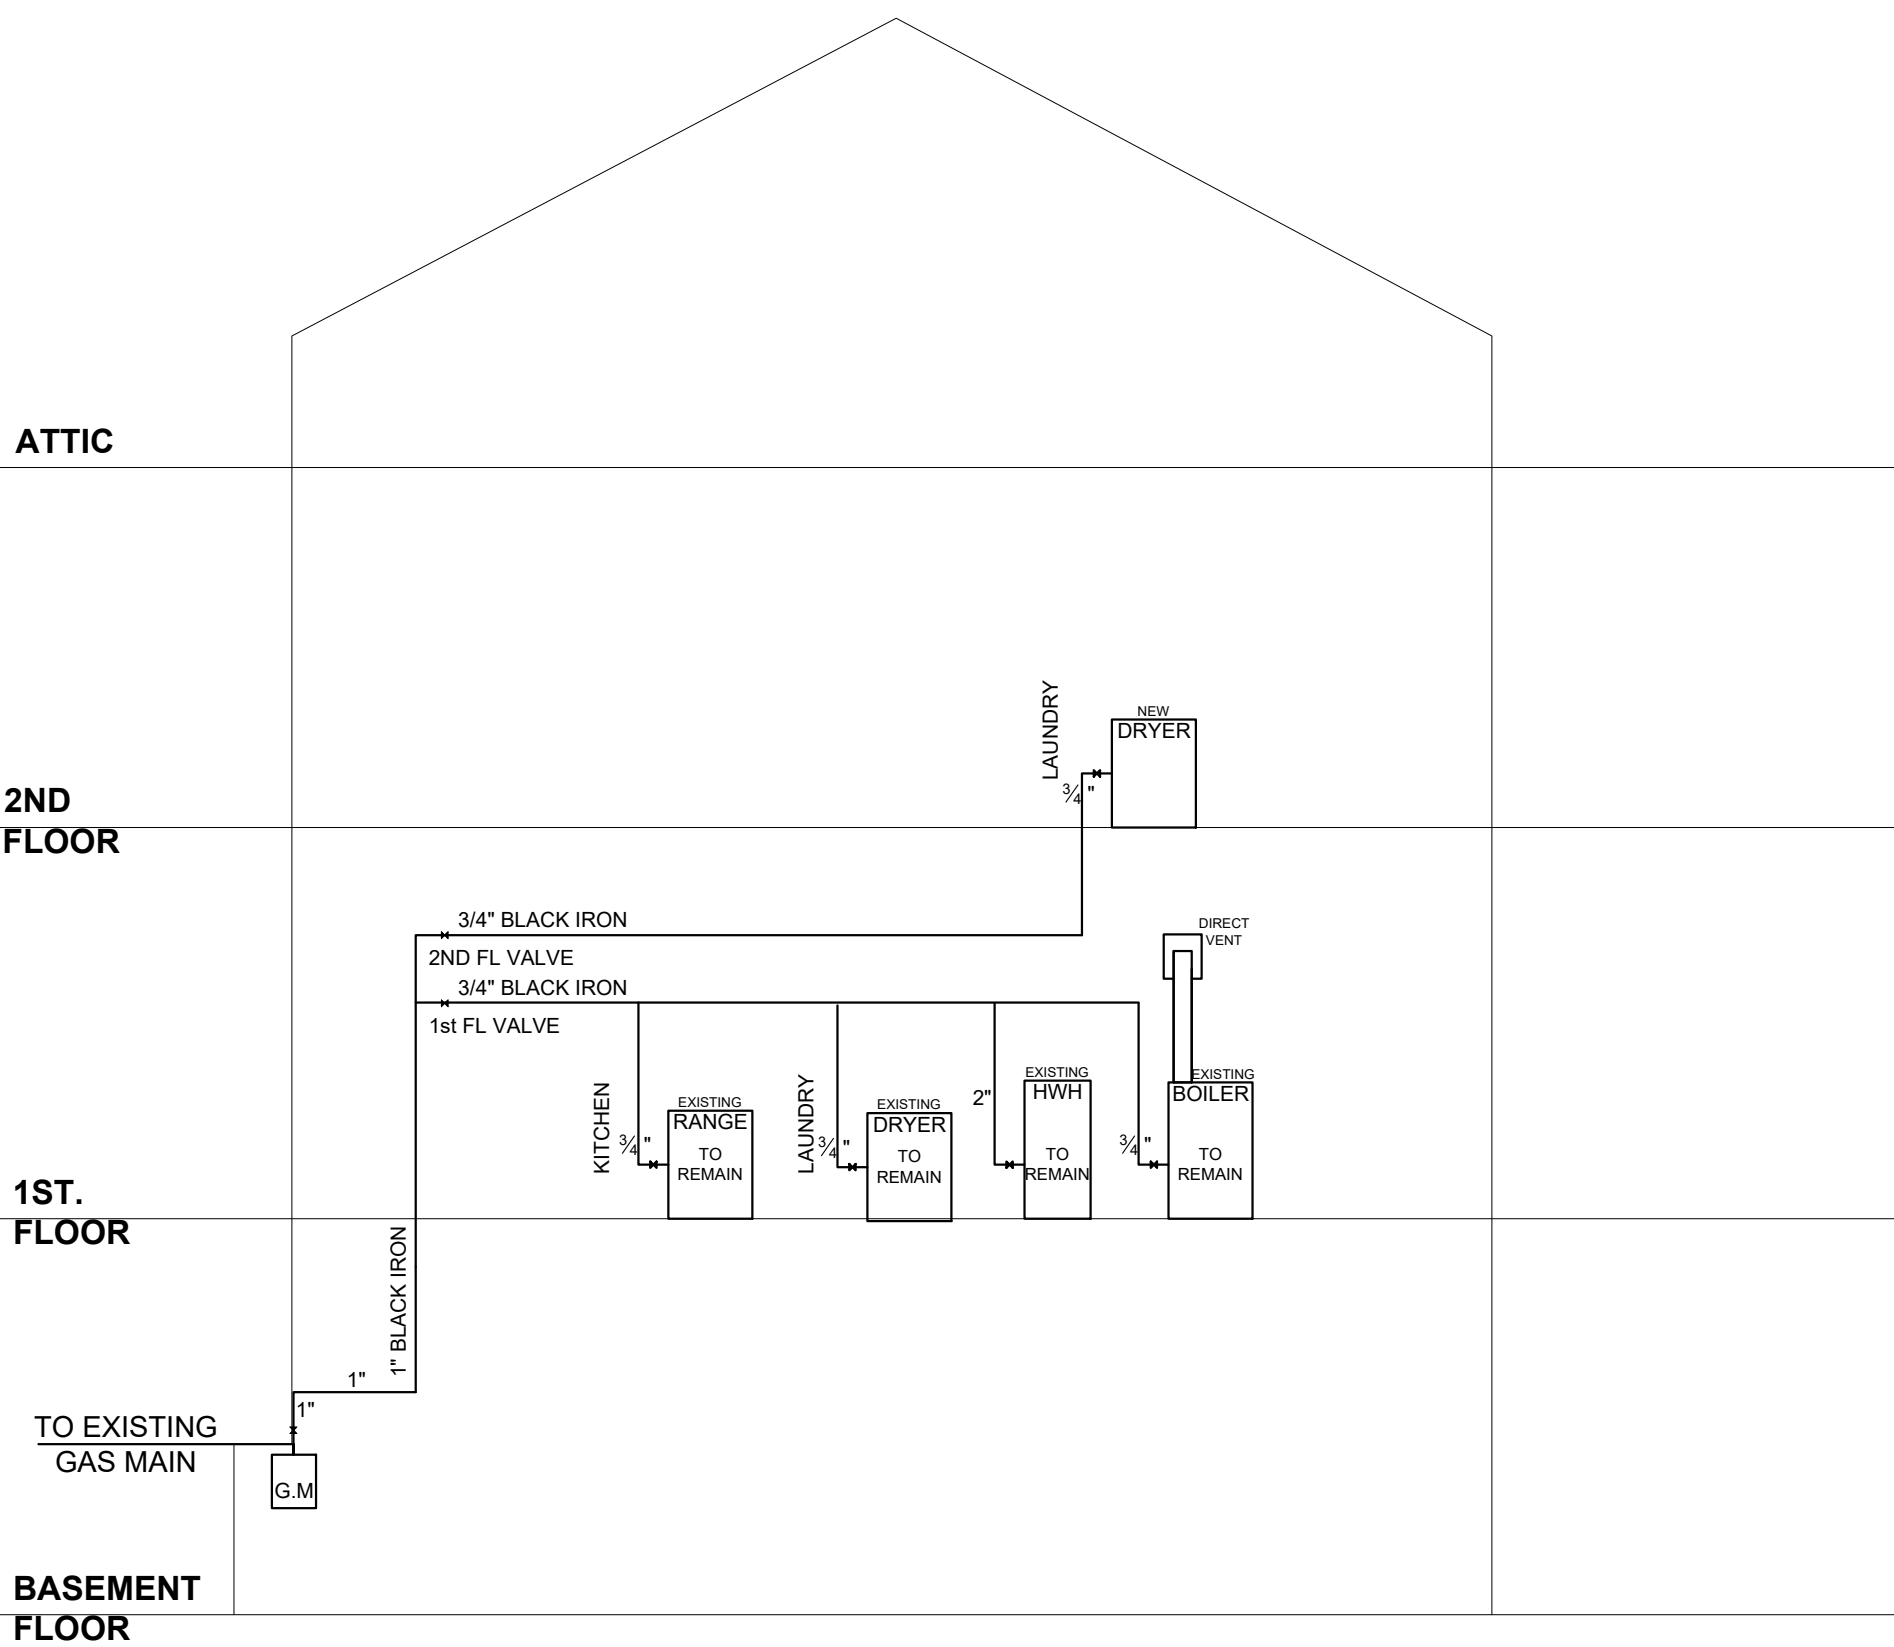

GAS RISER DIAGRAM

SCALE N.T.S

PLUMBING & GAS NOTES

1. PROVIDE CLEAN OUTS AT BASE OF ALL STACKS
2. COMPLETE PLUMBING SYSTEM AND DRAINAGE SYSTEM INSTALLATION SHALL COMPLY WITH SUBCHAPTER 16.
3. PROVIDE SHUT OFF VALVES ON ALL WATER SUPPLY LINES AT FIXTURES
4. PURGE ALL WATER AND GAS LINES BEFORE FINAL CONNECTIONS
5. PROVIDE AIR CHAMBERS AT TOP OF WATER RISERS MINIMUM 18" HIGH 12xDIAL
6. STANDARD WEIGHT BLACK STEEL PIPE FOR GAS SYSTEM WITH GALVANIZED STEEL FITTINGS
7. FLOOR DRAINS SHALL BE PROVIDED WITH REMOVABLE STRAINER AS PER RS 16
8. TRAPS FOR FLOOR DRAINS SHALL BE DEEP SEAL TYPE
9. APPROVED TYPE WATER METER TO BE INSTALLED TO CONFORM WITH LEGISLATION SIGNED INTO LAW ON JULY 31, 1985
10. ALL PIPING INSTALLED TO SERVICE BUILDING AND WITHIN BUILDING SHALL BE THERMALLY INSULATED AS PER NEW YORK STATE ENERGY CONSERVATION CONSTRUCTION CODE.
11. WATER METERS LOCATED OUTSIDE OF THE BUILDING AND WITHIN THE PROPERTY LINE, SHALL BE INSTALLED IN AN ACCESSIBLE WATERTIGHT AND FROST PROOF PIT OR METR BOX AS PER SEC. P1073 (B)
12. PLUMBING STACK VENT TO BE MIN 4" DIA. XHCI AND TO EXTEND 7'-0" MINIMUM ABOVE FINISHED ROOF
13. INSTALLATION OF WATER SUPPLY SERVICE LINES SHALL COMPLY WITH SEC. P107.2.
14. SEPARATION OF WATER SUPPLY SERVICE AND BUILDING SEWER SHALL COMPLY WITH SEC. F1072 (B) (6)
15. PROTECTIVE COVER FOR SERVICE PIPE SHALL COMPLY WITH SEC. P107.2 (B) (6)
16. WATER METER LOCATION SHALL BE SUBJECT TO APPROVAL BY THE DEPARTMENT OF WATER SUPPLY GAS AND ELECTRICITY, AND SHALL COMPLY

WITH SEC. P107.3 (B)

17. PRIOR TO THE INSTALLATION OF HOUSE DRAIN, PLUMBING CONTRACTOR SHALL CHECK AND VERIFY DEPTH OF SEWER /SEWERS IN STREET, TO ASCERTAIN THE COMPLIANCE OF PROVIDING THE MINIMUM REQUIRED PITCH OF HOUSE SEWER, AS PER BUILDING CODE REQUIREMENTS ANY DISC REP FANCIES SHALL BE REPORTED TO ARCHITECT IMMEDIATELY Y PRIOR TO START OF ANY WORK
18. ROOF GUTTERS INSTALLED AS PER RS 16-19
19. PLUMBING CONTRACTOR SHALL VERIFY ALL INVERTS AND EXISTING CONDITIONS PRIOR TO THE INSTALLATION OF NEW WORK
20. ALL HOT AND COLD WATER LINES TO BE INSULATED WITH FIBERGLASS -FOIL BACKED INSULATION JACKETS
21. WASHING MACHINES TO BE PROVIDED WITH VACUUM BREAKERS ALL WASHING MACHINES SHALL BE M.E.A. APPROVED TYPE, VACUUM
22. LAUNDRY ROOM /BOILER ROOM FLOOR DRAINS, TRAPS FOR FLOOR DRAINS, SHALL BE DEEP SEAL TYPE
23. PLUMBING FIXTURES TO COMPLY WITH NATIONAL STANDARD OF REFERENCE STANDARDS RS-16
24. ALL NEW WATER CLOSETS AND ASSOCIATED FLUSH VALVES INSTALLED SHALL MEET NEW WATER SAYING 1.6 GALLON TYPE AND LABELED AS SUCH
25. DRY WELLS TO BE INSTALLED AT LOCATION SHOWN ON SD 1-2 APPLICATION FILED WITH THE NYC DEPARTMENT OF ENVIRONMENTAL PROTECTION

GAS NOTES

1. ALL MATERIALS USED IN GAS DISTRIBUTION PIPING SYSTEM SHALL BE IN ACCORDANCE WITH DEPARTMENT OF BUILDINGS REQUIREMENTS AND ANSI Z223.1-1774, NATIONAL FUEL CODE AND ALL AGENCIES HAVING JURISDICTION
2. THE INSTALLATION OF GAS SERVICE PIPING SHALL BE MADE IN ACCORDANCE

WITH THE REQUIREMENTS OF THE UTILITY CORPORATION PROVIDING THE SERVICE AS REGULATED BY PART 255, OF TITLE 16, OF THE OFFICIAL COMPILATION OF CODES, RULES AND REGULATIONS OF THE STATE OF NEW YORK.

3. BRANCH LINES SHALL BE TAKEN OFF THE RISER WITH NOT LESS THEN TWO ELBOWS SWING BRANCH OUTLET PIPES SHALL BE TAKEN FROM THE TOP OR SIDES OF HORIZONTAL LINES AND NOT FROM THE BOTTOM
4. PROVIDE STOP COCK OR VALVE FOR EACH GAS BURNING FIXTURE AND EQUIPMENT REQUIRING GAS

GAS PIPING INSTALLATION NOTES

5. ALL PIPING SHALL BE SCHEDULE 40 BLACK STEEL WITH 125 LBS. CAST IRON SCREWED FITTINGS
6. PROVIDE SHUT- OFF GAS COCKS IN GAS SERVICE PIPING AT CONNECTIONS TO EXHIBITING MAIN
7. ALL GAS PIPING SHALL BE SUPPORTED FROM BUILDING STRUCTURE IN AN APPROVED MANNER
8. PROVIDE GAS COCK CONNECTION TO GAS TRAIN FOR EACH GAS- FIRED EQUIPMENT ITEM AND ON RISERS AND BRANCHES WHERE INDICATED
9. LOCATE GAS COCKS WHERE EASILY ACCESS ABLE, AND WHERE THEY WILL BE PROTECTED FORM POSSIBLE DAMAGE
10. CONNECT GAS PIPING TO EACH GAS- FIRED EQUIPMENT ITEM IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS